



PRODUCT CATALOG

- 2024 -



WoodMaxx
Power Equipment Ltd.

CURRAHEE TRAILERS





Engenuity Outdoor Equipment unites top brands to empower DIY enthusiasts and professional consumers who take pride in what they do. Offering a diverse range of products like outdoor power equipment, snow plows, winches, trailers, and auto accessories, our commitment is to build quality products that stand up to the most difficult outdoor tasks.

**4-47**

WOOD CHIPPERS	5-13
STUMP GRINDERS	14-15
TRENCHER	16
LOG SPLITTERS	17-19
COMPACTOR	20
DUMP CARTS	21-24
TRAILERS	25-35
ATV/UTV WINCHES	36-39
4X4 WINCHES	40-42
INDUSTRIAL WINCHES	43-47

**48-60**

PTO & SKID STEER WOOD CHIPPERS	49-54
PTO BACKHOE ATTACHMENTS	55
GAS-POWERED WOOD CHIPPER	56
PTO FLAIL MOWERS	57-59
PTO ROTARY TILLERS	60

**61-75**

LANDSCAPE TRAILERS	62-67
EQUIPMENT HAULER TRAILERS	68-74
CAR HAULER TRAILERS	75

**76-84**

SNOW PLOWS	77-81
PTO & SKID STEER SNOW BLOWERS	82-84



DK2 POWER exemplifies our dedication to quality and performance in outdoor power equipment. We manufacture top-quality gas-powered **wood chippers, stump grinders, log splitters, trenchers, and dump carts.** Each product is engineered for durability, efficiency, and ease of use, meeting the rigorous demands of both professionals and home users.





3-INCH 6.5 HP 196 CC DISK CHIPPER SHREDDER

ITEM NUMBER

OPC513

UPC

827518009123

DESCRIPTION

Experience the power and efficiency of OPC513, a robust chipper shredder designed to effortlessly handle tough yard tasks. Equipped with the high-performance KOHLER® 2000 Series RH265 engine, it effortlessly deteriorates trees up to 3" in diameter into valuable mulch. This versatile machine is also capable of efficiently processing twigs, leaves, and garden composting materials up to 3/8" in diameter. With its large chip bag capacity of up to 4.3 bushels, you can work continuously without interruptions. The inclusion of extra large feed chutes ensures a smooth workflow, while the convenient drop stand, removable tow bar, and durable off road tires make transportation and breeze.

SPECIFICATION

ENGINE	KOHLER® 2000 Series RH265 6.5 HP 196 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	4.10/3.50-4 Ø10" (Ø25.4 cm) O.D. x 3.5" (8.9 cm)
WHEELBASE	21.7" (55 cm)
CHIPPING CAPACITY	Ø3" (Ø7.6 cm) (side feed chute) Ø3/8" (Ø0.95 cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
CHIP BAG CAPACITY	4.3 bushels (0.15 CBM)
COUPLER	Lawn tractor/ATV hitch pin
DIMENSIONS	41.7" (L) x 34.3" (W) x 37.4" (H) 106cm (L) x 87cm (W) x 95cm (H)
WEIGHT	136.7lb (62kg)
SHIPPING DIMENSIONS	29.5" (L) x 22" (W) x 20.9" (H) 75cm (L) x 56cm (W) x 53cm (H)
SHIPPING WEIGHT	158.7lb (72kg)
WARRANTY	2-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® 2000 Series RH265 6.5 HP 196 cc engine **1**
- Direct drive combo chipper shredder with double edge chip and hammer shredders
- Perfect for trees up to 3" (7.6 cm) in diameter, and twigs, leaves and garden composting up to 3/8" (0.95 cm) in diameter
- Includes a chip bag capable of holding up to 4.3 bushels
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 4.10/3.50-4 Ø10.2" (Ø26 cm) OD x 3.9" (10 cm) tires **4**
- Hitch-pin towing capability
- Includes 2-year KOHLER® engine and 1-year DK2 chassis warranty
- OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**





3-INCH 7 HP 208 CC DISK CHIPPER SHREDDER

ITEM NUMBER

OPC503

UPC

826518005487


DESCRIPTION

The ATV-towable 3-inch direct drive OPC503 chipper shredder is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, a removable key lock shutoff, and ATV-locking off-road tires.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm)
WHEELBASE	28" (71.1 cm)
CHIPPING CAPACITY	Ø3" (Ø7.6 cm) (side feed chute) Ø3/8" (Ø0.95 cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and quad hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08 cm)
DIMENSIONS	71" (L) x 36.5" (W) x 48" (H) 180.3 cm (L) x 92.7 cm (W) x 121.9 cm (H)
WEIGHT	187 lb (84.8 kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 22" (H) 109.2 cm (L) x 58.4 cm (W) x 55.9 cm (H)
SHIPPING WEIGHT	199 lb (90.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Direct drive combo chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6 cm) through the side feed chute and brush up to Ø3/8" (Ø0.95 cm) through the top-loading hopper
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm) tires on ATV-locking wheels with a 28" (71.1 cm) wheelbase **4**
- Removable key shutoff
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**





3-INCH 7 HP 208 CC DISK CHIPPER SHREDDER & VACUUM

ITEM NUMBER
OPC503V


UPC
827518006979

DESCRIPTION

The ATV-towable 3-inch direct drive OPC503V chipper shredder vacuum combo is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer. Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, a removable key lock shutoff, and ATV-locking off-road tires.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm)
WHEELBASE	28" (71.1 cm)
CHIPPING CAPACITY	Ø3" (Ø7.6 cm) (side feed chute) Ø3/8" (Ø0.95 cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and quad hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	71" (L) x 36.5" (W) x 48" (H) 180.3 cm (L) x 92.7 cm (W) x 121.9 cm (H)
WEIGHT	187 lb (84.8 kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 22" (H) 109.2 cm (L) x 58.4 cm (W) x 55.9 cm (H)
SHIPPING WEIGHT	199 lb (90.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Vacuum kit included **2**
- Direct drive combo chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6 cm) through the side feed chute and brush up to Ø3/8" (Ø0.95 cm) through the top-loading hopper
- Extra large feed chutes **3**
- Drop stand and handy removable tow bar **4**
- 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm) tires on ATV-locking wheels with a 28" (71.1 cm) wheelbase **5**
- Removable key shutoff
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



4-INCH 7 HP 208 CC KINETIC DRUM CHIPPER

ITEM NUMBER

OPC524

UPC

827518007259

DESCRIPTION

The OPC524 4-inch kinetic chipper is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop. The engine delivers 10.5 ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 4-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims
CHIPPING CAPACITY	Ø4" (Ø10.16 cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø4" (Ø10.16 cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76 cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231.1 cm (L) x 76.2 cm (W) x 116.8 cm (H)
WEIGHT	300 lb (136.1 kg)
SHIPPING DIMENSIONS	34" (L) x 22" (W) x 35" (H) 86.4 cm (L) x 55.9 cm (W) x 88.9 cm (H)
SHIPPING WEIGHT	330 lb (149.7 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Chips through trees and branches up to 4" (10.2 cm) in diameter
- Dual-belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 4" (10.2 cm) in diameter **2**
- 175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (Ø15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and E-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76 cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**





5-INCH 9.5 HP 277 CC KINETIC DRUM CHIPPER

ITEM NUMBER

OPC525

UPC


827518008560

DESCRIPTION

The OPC525 5-inch kinetic chipper is powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop. The engine delivers 13.9 ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 5-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH395 9.5 HP 277 cc
GEARBOX	13.9 ft/lb (18.8 Nm) gross torque
WHEELS & TIRES	175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims
CHIPPING CAPACITY	Ø5" (Ø12.7 cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø5" (Ø12.7 cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76 cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231.1 cm (L) x 76.2 cm (W) x 116.8 cm (H)
WEIGHT	308.6 lb (140 kg)
SHIPPING DIMENSIONS	35.8" (L) x 22" (W) x 37.8" (H) 91 cm (L) x 56 cm (W) x 96 cm (H)
SHIPPING WEIGHT	352.7 lb (160 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine **1**
- Chips through trees and branches up to 5" (12.7 cm) in diameter
- Dual-belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 5" (12.7 cm) in diameter **2**
- 175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (Ø15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and E-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76 cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**





5-INCH 14 HP 429 CC AUTO-FEED ELECTRIC START DISK CHIPPER

ITEM NUMBER
OPC505AE



UPC
827518006702

DESCRIPTION

Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine featuring electric start-up and a self contained auto-feed system with hydraulic roller speeds up to 600 RPM. The OPC505AE features a 3600 RPM drive and auto-adjusting feed chamber to demolish trees up to 5.25 inches in diameter, internal free-spinning teeth, large feed chute, adjustable pickup height rotational expulsion chute, tool-free 180° adjustable 61-inch chip chute perfect for pickup truck bed loading, and includes a set of lockout keys, safety glasses, ear protection, work gloves, oil bottle and assembly tools.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	D.O.T. approved 8.00-7 Ø16" (Ø40.6 cm) OD
WHEELBASE	47" (119.4 cm)
CHIPPING CAPACITY	Ø5.25" (Ø13.3 cm)
BLADES & TEETH	High-speed disk-mounted steel and free-spinning internal 45# steel teeth
CHIPPER SHREDDER	Auto-adjusting from Ø1/8" (Ø0.32 cm) brush to Ø5.25" (Ø13.3 cm) trees
SELF-FEEDING	Auto blade feeding hydraulic system
EXPULSION CHUTE	Truck bed height with 180° adjustable spout
COUPLER	2" (5.08 cm)
DIMENSIONS	91" (L) x 40" (W) x 69" (H) 231.1 cm (L) x 101.6 cm (W) x 175.3 cm (H)
WEIGHT	638 lb (289.4 kg)
SHIPPING DIMENSIONS	63" (L) x 33" (W) x 45" (H) 160 cm (L) x 83.8 cm (W) x 114.3 cm (H)
SHIPPING WEIGHT	726 lb (329.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Dual swing-open chutes for easy drum access
- High-speed disk chipper shredder with free-spinning internal teeth **2**
- 600RPM hydraulic feed
- Auto blade feeding system
- Auto adjust cutters for brush up to 5.25" (13.3cm) diameter trees
- All-terrain on/off road tires D.O.T. approved (not for highway use) with included 2" (5.08cm) ball tow bar **3**
- Dual, tool free rotational spout on chip chute
- Extra-large reinforced feed hopper with integrated equipment moving handles and e-stop shutoff **4**
- Electric start (battery included)
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



6-INCH 14 HP 429 CC CYCLONIC DRUM CHIPPER SHREDDER

ITEM NUMBER

OPC506

UPC

826518005517


DESCRIPTION

The DK2 POWER OPC506 is a 6-inch cyclonic chipper shredder is powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine, equipped with dual 12-inch, double-edge reversible cutting blades that auto-adjust to pulverize trees and brush up to 6.25 inches in diameter.

Featuring large quick open hoppers, 59-inch truck bed height chip chute with adjustable cast iron rotating hood, easy drop stand, removable tow bar, 2-inch hitch, premium built-in tool box, Key shutoff with lock out safety switch. Extended 48-inch safety stability axle with D.O.T. tires. Safety kit includes tools, glasses, ear protection and gloves.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm)
WHEELBASE	48" (121.9 cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9 cm)
BLADES	Steel double edge reversible
CHIPPER SHREDDER	Auto-adjusting from Ø3/8" (Ø0.95 cm) brush to Ø6.5" (Ø16.5 cm) trees
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	395 lb (179.2 kg)
SHIPPING DIMENSIONS	44" (L) x 26" (W) x 44" (H) 111.8 cm (L) x 66 cm (W) x 111.8 cm (H)
SHIPPING WEIGHT	461 lb (209.1 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Reversible double-edge reversible high-speed cutting blades **2**
- Auto-adjusting cyclonic drum chamber deteriorates trees and brush up to 6.25" (15.9 cm) in diameter
- Large, quick-open hoppers
- 59" (149.9 cm) pickup truck bed height expulsion chute with adjustable cast iron rotating hood and easy drop stand **3**
- Removable tow bar with 2" (5.08 cm) hitch receiver **4**
- Premium built-in toolbox
- Key shutoff with lock out safety switch
- Extended 48" (121.9 cm) safety stability axle
- D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm) **5**
- Includes safety kit
- Integrated chute handles, powder-coated for durability
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



6-INCH 14 HP 429 CC ELECTRIC START CYCLONIC DRUM CHIPPER SHREDDER

ITEM NUMBER
OPC506E

UPC
827518008607

DESCRIPTION

The DK2 POWER OPC506E is a 6-inch cyclonic chipper shredder is powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine, equipped with dual 12-inch, double-edge reversible cutting blades that auto-adjust to pulverize trees and brush up to 6.25 inches in diameter.

Featuring electric start, large quick open hoppers, 59-inch truck bed height chip chute with adjustable cast iron rotating hood, easy drop stand, removable tow bar, 2-inch hitch, premium built-in tool box, Key shutoff with lock out safety switch. Extended 48-inch safety stability axle with D.O.T. tires. Safety kit includes tools, glasses, ear protection and gloves.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm)
WHEELBASE	48" (121.9 cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9 cm)
BLADES	Steel double edge reversible
CHIPPER SHREDDER	Auto-adjusting from Ø3/8" (Ø0.95 cm) brush to Ø6.5" (Ø16.5 cm) trees
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	395 lb (179.2 kg)
SHIPPING DIMENSIONS	44" (L) x 26" (W) x 44" (H) 111.8 cm (L) x 66 cm (W) x 111.8 cm (H)
SHIPPING WEIGHT	461 lb (209.1 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Reversible double-edge reversible high-speed cutting blades **2**
- Auto-adjusting cyclonic drum chamber deteriorates trees and brush up to 6.25" (15.9 cm) in diameter
- Large, quick-open hoppers
- 59" (149.9 cm) pickup truck bed height expulsion chute with adjustable cast iron rotating hood and easy drop stand **3**
- Removable tow bar with 2" (5.08 cm) hitch receiver **4**
- Premium built-in toolbox
- Key shutoff with lock out safety switch
- Extended 48" (121.9 cm) safety stability axle
- D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm) **5**
- Includes safety kit
- Integrated chute handles, powder-coated for durability
- Electric start (battery included)
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**





6-INCH 14 HP 429 CC KINETIC CYCLONIC ELECTRIC START DRUM CHIPPER SHREDDER

ITEM NUMBER

OPC566E

UPC

827518006757

DESCRIPTION

The OPC566E is a 6-inch kinetic cyclonic chipper powered by an electric start, direct drive KOHLER® Command PRO® CH440 14 HP 429 cc engine and demolishes trees up to 6.25 inches in diameter. Equipped with double edge reversible 12-inch cutting blades that auto-adjust to pulverize trees and brush, dual tool-free chutes, D.O.T. approved tires and a 48-inch extended axle for uneven ground and towing stability with front articulated ground wheels for easy equipment moving, a 2-inch hitch receiver and tow bar, and a rotational expulsion chute pickup truck height for bed loading.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
REAR WHEELS & TIRES	D.O.T. approved 4.80-8 Ø15" (Ø41.9 cm) OD x 4.25" (10.8 cm) on 9" (22.9 cm) rims
FRONT WHEELS & TIRES	Off-road 4.10-4 Ø10" (Ø25.4 cm) OD on Ø5" (Ø12.7 cm) rims
WHEELBASE	48" (121.9 cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9 cm)
CUTTERS	12" (30.5 cm) double edge reversible chipper blades
CHIPPER SHREDDER	Auto-adjusting from Ø1/8" (Ø0.32 cm) up to Ø6.25" (Ø15.9 cm) trees and brush
EXPULSION CHUTE	59" (149.9 cm) truck bed height with 180° adjustable spout
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	594 lb (269.4 kg)
SHIPPING DIMENSIONS	45" (L) x 31" (W) x 48" (H) 114.3 cm (L) x 78.7 cm (W) x 121.9 cm (H)
SHIPPING WEIGHT	726 lb (329.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Dual-belt drive drum transmission with 12" (30.5 cm) double edge reversible cutting blades **2**
- Auto adjust cutters for trees and brush up to 6.25" (15.9 cm) in diameter
- 48" (121.9 cm) axle with D.O.T. approved 4.80-8 Ø15" (Ø41.9 cm) OD rear tires on Ø9" (Ø22.9 cm) rims and off-road 4.10-4 Ø10" (Ø25.4 cm) OD front tires on Ø5" (Ø12.7 cm) rims **3**
- Includes safety kit
- Electric start (battery included) **4**
- CE safety approved shutoff
- Dual tool free swing open chutes
- Tool-free 180° rotational spout on 59" (149.9 cm) truck bed height expulsion chute
- Extra-large feed chute with integrated equipment moving handles
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



12-INCH 14 HP 429 CC STUMP GRINDER

ITEM NUMBER

OPG777

UPC

826518005524

DESCRIPTION

Introducing the OPG777 12-inch stump grinder powered by a KOHLER® Command PRO® CH440 14HP 429cc engine and mounted on a heavy-duty welded 2-inch solid steel frame structurally engineered for endurance performance with a heavy-duty 2-inch axle and dual locking hitch pins for trouble-free wheel brakes and transport over rough terrain. The direct drive delivers 3600 RPM and 22.7 ft/lb of gross torque to a 12-inch solid steel cutting wheel mounted on premium pillar bearings. This machine demolishes stumps with a total of 9 carbide teeth cutting 3-1/2 inches wide per cut and cuts any diameter stump 12-inches above and 9-inches below ground. Additional features include key shut-off, locking throttle, drop stand, and solid bar lift handles.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm)
WHEELBASE	32" (81.3 cm)
TEETH	9 x FC11C carbide cast mounted
STUMP CAPACITY	Any diameter, 12" (30.5 cm) high
CUTTING WIDTH	3.5" (8.9 cm)
COUPLER	2" (5.08 cm)
DIMENSIONS	91" (L) x 32" (W) x 52" (H) 231.1 cm (L) x 81.3 cm (W) x 132.1 cm (H)
WEIGHT	234 lb (106.1 kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 25" (H) 109.2 cm (L) x 58.4 cm (W) x 63.5 cm (H)
SHIPPING WEIGHT	275 lb (124.7 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Demolishes stumps with 9 carbide teeth cutting 3.5" (8.9 cm) wide per cut. **2**
- Cuts any diameter stump 12" (30.5 cm) above and 9" (22.9 cm) below ground.
- Extreme duty 2" (5.08 cm) x 2" (5.08cm) axle with dual locking hitch pins for trouble-free wheel brakes and transport over rough terrain
- 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm) tires on ATV-locking wheels **3**
- Key shut-off
- Locking throttle
- Drop stand and removable tow bar **4**
- Solid bar lift handles
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



14-INCH 14 HP 429 CC ELECTRIC START STUMP GRINDER

ITEM NUMBER

OPG888E

UPC

827518006719

DESCRIPTION

Introducing the OPG888E, powered by a KOHLER® Command PRO® CH440 14HP 429cc engine with electric start, and is capable of demolishing stumps 14 inches above ground and 10 inches below ground with its dual V-belt direct drive 22.7 ft/lb gross torque and 12 FC11C carbide cast mounted teeth that cut 4 inches wide. This machine features a heavy-duty frame, 145/70-6 ATV tires, a removable flip tow bar for easy trolley or off-road towing up to 15 mph (24 km/h), an operator controlled posi-lock wheel brake for pivot grinding, and a bow handle with CE safety approved hands-off shut down.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	ATV 145/70-6 Ø13.75" (Ø35 cm) x 5.25" (13.3 cm)
WHEELBASE	32" (81.3 cm)
TEETH	12 x FC11C carbide cast mounted
STUMP CAPACITY	Any diameter, 14" (35.6 cm) high
CUTTING WIDTH	4" (10.2 cm)
BATTERY	12V 14Ah
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 48" (W) x 59" (H) 259.1 cm (L) x 121.9 cm (W) x 149.9 cm (H)
WEIGHT	285 lb (129.3 kg)
SHIPPING DIMENSIONS	42" (L) x 31" (W) x 26" (H) 106.7 cm (L) x 78.7 cm (W) x 66 cm (H)
SHIPPING WEIGHT	308 lb (139.7 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Performs 4" (10.2 cm) wide cuts with 12 FC11C carbide cast mounted teeth **2**
- Heavy-duty steel frame
- ATV 145/70-6 Ø13.75" (Ø35 cm) x 5.25" (13.3 cm) tires on a 32" (81.3 cm) wheelbase **3**
- Removable flip tow bar with a 2" (5.08 cm) hitch receiver **4**
- Operator controlled Posi-lock wheel brake for pivot grinding
- Bow handle with CE safety approved hands-off shut-down **5**
- Demolishes any diameter stump up to 14" (35.6 cm) above and 10" (25.4 cm) below ground
- 12V 14Ah battery included for electric start capability
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



18-INCH 7 HP 208 CC TRENCHER

ITEM NUMBER

OPT118

UPC

826518005586

DESCRIPTION

The OPT118 is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine equipped with a direct drive chain trencher that travels at 180 ft/min to create 18-inch deep by 4-inch wide channels using its 3/8-inch plow plates and 21 quick-change carbide alloy high-pressure tri-cut teeth that run at 400RPM, and to ensure a cleaner operation, the OPT118 is equipped with a 6-inch side off-loading auger that removes dirt from the channel.

This machine also features a heavy-duty steel construction, adjustable handle with a release and stop safety hand grip, and 15-inch 6.00-6 wheels with auto-lock in reverse capability.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	6.00-6 Ø15" (Ø38.1 cm) OD auto-lock in reverse
CHAIN SPEED	180 ft/min (54.9 m/min)
CHAIN DIMENSION	63" (160 cm)
TRENCH SIZE	4" (W) x 18" (D) 10.2 cm (W) x 45.7 cm (D)
TEETH	21 x carbide alloy high-pressure
AUGER	6" (15.2 cm) side off-load
DIMENSIONS	95" (L) x 47" (W) x 59" (H) 241.3 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	335 lb (152 kg)
SHIPPING DIMENSIONS	41" (L) x 30" (W) x 33" (H) 104.1 cm (L) x 76.2 cm (W) x 83.8 cm (H)
SHIPPING WEIGHT	362 lb (164.2 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Direct chain drive trencher chain and auger
- 5 depth positions
- Auto-locking in reverse 6.00-6 Ø15" (Ø38.1 cm) OD tires and wheels for digging in reverse **2**
- 3/8" (0.95 cm) plow plates with 21 carbide alloy high-pressure quick change teeth **3**
- Adjustable handle with release and stop safety hand grip **4**
- 6" (15.2 cm) direct drive auger
- Heavy gauge steel construction
- Direct drive with 400RPM tri-cut teeth chain drive at 180ft/min (54.9 m/min) dig rate
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



27-TON 6.5 HP 196 CC HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS227

UPC

827518008577

DESCRIPTION

Introducing the 27-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS227 is driven by a powerful KOHLER® SH265 6.5 HP 196 cc engine. This machine is capable of splitting up to 25.5 inches in length and 19.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8-inch heat-treated steel wedge. The OPS227 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5 HP 196 cc
SPLITTING CAPACITY	25.5" (L) x Ø19.6" 64.7 cm (L) x Ø54.8 cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4" (Ø10.2 cm) x 24" (60.9 cm) stroke
HYDRAULIC FLOW RATE	15 GPM (56.8 LPM), two-stage
HYDRAULIC OIL CAPACITY	6.5 gal (24.6 L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8" (20.3 cm) high, heat-treated steel
BEAM	8" (20.3 cm) foot plate
VALVE	Auto-retract with adjustable detent
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16" (Ø40.6 cm) OD
WHEELBASE	37" (94 cm)
COUPLER	2" (5.08 cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	87.4" (L) x 49.2" (W) x 35.8" (H) @ 507 lb 222 cm (L) x 125 cm (W) x 91 cm (H) @ 230 kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 507 lb 180 cm (L) x 80 cm (W) x 50 cm (H) @ 230 kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5 HP 196 cc engine **1**
- 25.5" x Ø19.6" (64.8 cm x Ø49.8 cm) log capacity
- 8" (20.3 cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved Ø16" (Ø40.6 cm) OD road tires sitting on a 37" (94 cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15 GPM (56.8 LPM) pump
- 6.5 gallon (24.6 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08 cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty
- NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



32-TON 6.5 HP 196 CC HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS232

UPC

827518008584

DESCRIPTION

Introducing the 32-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS232 is driven by a powerful KOHLER® SH265 6.5 HP 196 cc engine. This machine is capable of splitting up to 25.5 inches in length and 21.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8.5-inch heat-treated steel wedge. The OPS232 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5 HP 196 cc
SPLITTING CAPACITY	25.5" (L) x Ø21.6" 64.7 cm (L) x Ø54.8 cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4.5" (Ø11.4 cm) x 24" (60.9 cm) stroke
HYDRAULIC FLOW RATE	15 GPM (56.8 LPM), two-stage
HYDRAULIC OIL CAPACITY	8.5 gal (32 L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8.5" (21.6 cm) high, heat-treated steel
BEAM	8.5" (21.6 cm) foot plate
VALVE	Auto-retract with adjustable detent
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16" (Ø40.6 cm) OD
WHEELBASE	37" (94 cm)
COUPLER	2" (5.08 cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	89.4" (L) x 51.2" (W) x 37.4" (H) @ 529.1lb 227 cm (L) x 130 cm (W) x 95 cm (H) @ 240kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 573 lb 180 cm (L) x 80 cm (W) x 50 cm (H) @ 260 kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5 HP 196 cc engine **1**
- 25.5" x Ø21.6" (64.8 cm x Ø54.8 cm) log capacity
- 8.5" (21.6 cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved Ø16" (Ø40.6 cm) OD road tires sitting on a 37" (94cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15 GPM (56.8 LPM) pump
- 8.5 gallon (32 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08 cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty
- NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



40-TON 7 HP 208 CC KINETIC HORIZONTAL LOG SPLITTER

ITEM NUMBER

OPS240

UPC

826518005746


DESCRIPTION

Introducing the DK2 POWER OPS240 40-ton kinetic log splitter, powered by a KOHLER® CH270 7HP 208cc Command PRO® engine for outstanding performance. Equipped with an oversized reinforced steel work table, safety lockout and a clam shell quick-access body for easy use and maintenance.

The OPS240 has an 8-inch expansion wedge and an auto-retracting bearing-guided ram to drive through logs up to 22 inches in diameter and up to 22 inches in length. Keep yourself safe while working with its extended stability stand and ATV locking wheels, keeping the splitter securely in place.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	ATV-locking
SPLITTING CAPACITY	Ø22" x 22" (L) Ø55.9 cm x 55.9 cm (L)
WEDGE	8" (20.32 cm), steel
H-BEAM	25" (63.5 cm) ground clearance
CYCLE TIME	1 second
COUPLER	2" (5.08 cm)
DIMENSIONS	120" (L) x 37" (W) x 44" (H) 304.8 cm (L) x 94 cm (W) x 111.8 cm (H)
WEIGHT	616 lb (279.4 kg)
SHIPPING DIMENSIONS	71" (L) x 27" (W) x 26" (H) 180.3 cm (L) x 68.6 cm (W) x 66 cm (H)
SHIPPING WEIGHT	690 lb (313 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® Commercial CH270 7 HP 208 cc engine **1**
- 8" (20.32 cm) solid steel expansion wedge **2**
- Oversized steel worktable with quad-log slides **3**
- H-beam height sits at 25" (63.5 cm)
- Heat-treated ram with bearing glide force and auto-retraction
- Extended stability stand
- ATV-locking wheels **4**
- Fits on a 2" (5.08 cm) hitch receiver for easy towing
- Quick-release clam shell body for easy access to interior of the unit **5**
- Safety lock out
- Super-quick 1 second cycling time
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**





17-INCH X 21-INCH 7 HP 208 CC PLATE COMPACTOR

ITEM NUMBER

OPV425

UPC

827518008249

DESCRIPTION


Featuring a large 17-inch by 21-inch base plate, the OPV425 plate compactor doesn't disappoint when it comes to compacting performance, and the power that drives this machine comes from a KOHLER® Command PRO® CH270 7HP 208cc engine.

With a compacting force of 3,600 lb (16 kn) at 4,750 vibrations per minute, this unit is the perfect solution for your compacting needs.

Designed with conveniently placed, 27.5-inch folding handles for easy transportation and storage, open design to reduce dirt build-up, and a central-mounted, fully enclosed exciter for even compacting force over the entire base plate.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
BASE PLATE	17" (43.2 cm) x 21" (53.3 cm)
HANDLE LENGTH	27.5" (69.9 cm)
VIBRATION FREQUENCY	4,750 VPM
CENTRIFUGAL FORCE	3,600 lb/ft (16 kn)
COMPACTING DEPTH	11.8" (30 cm)
SPEED	12.6 in/sec (32 cm/sec)
DIMENSIONS	17" (L) x 21" (W) x 29" (H) 43.2 cm (L) x 53.3 cm (W) x 73.7 cm (H)
WEIGHT	198.4 lb (90 kg)
SHIPPING DIMENSIONS	18.9" (L) x 26.4" (W) x 28.3" (H) 48 cm (L) x 67.1 cm (W) x 72 cm (H)
SHIPPING WEIGHT	227 lb (103 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® CH270 7HP 208cc Command PRO® Commercial Engine **1**
- 17" (43.2 cm) x 21" (53.3 cm) solid steel base plate
- Conveniently placed 27.5" (69.9 cm) folding handles for easier transportation and stowaway **2**
- Open design to reduce dirt and residue build-up **3**
- Central-mounted, fully enclosed exciter for even compacting force over the entire base plate **4**
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty





SPECIAL EDITION 1100 LB 48V SELF-DRIVE ELECTRIC DUMP CART

ITEM NUMBER

OPD812

UPC

827518050477

DESCRIPTION

With a wet bucket for sand, gravel, concrete and more, the DK2 POWER OPD812 Self-Drive Electric Powered Dump Cart runs for up to 8-10 hours on one charge with its 12V 32Ah battery and moves it all. Equipped with an electric lift, this unit is capable of tipping its 8.34 cubic-foot bucket 90 degrees vertically for easy unloading. The OPD812 comes with throttle bar speed control and articulated rear wheels to keep your load level and steady. Equipped with an upgraded control panel, front-mounted lights, and control panel light, moving this machine around anytime - or anywhere - is made easy.

SPECIFICATION

BATTERY	12V, 32Ah lead-acid
MOTOR	1000W 48V brushless DC motor
PAYLOAD CAPACITY	1,100 lb (499 kg)
DRIVE WHEELS & TIRES	All-terrain 16 x 6.5-8
REAR WHEELS & TIRES	Articulated 13 x 5.00-6
MAX SPEED	3 mph
BRAKING	Electromagnetic
TIPPING	Gas rod
RUN TIME	8-10 hrs
CHARGE TIME	6-7 hrs
BUCKET SIZE	8.3 ft ³ (0.24 m ³) 62.3 gal (236 L)
DIMENSIONS	68.9" (L) x 28.7" (W) x 42.1" (H) 175 cm (L) x 72.8 cm (W) x 107 cm (H)
WEIGHT	392.4 lb (178 kg)
SHIPPING DIMENSIONS	52.4" (L) x 30.3" (W) x 33.9" (H) 133 cm (L) x 77 cm (W) x 86 cm (H)
SHIPPING WEIGHT	463 lb (210 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 12V, 32Ah battery and equipped with real-time battery capacity and voltage indicator on operator console **1**
- 8.34 ft³ sealed steel wet bucket **2**
- All-terrain 16 x 6.5-8 front wheel drive tires, with electric drive up to 3 mph and universal 13 x 5.00-6 rear tires to move effortlessly around job sites **3**
- Tipping capability for easy unloading **4**
- Throttle bar speed control with articulated floating rear wheels keep your load level and steady
- 30W headlights and auxiliary lights **5**
- 8-10 hour runtime and 6-7 hour charging time
- Electromagnetic braking system



1100 LB 48V SELF-DRIVE ELECTRIC HYDRAULIC DUMP CART

ITEM NUMBER

OPD811

UPC

826518005722

DESCRIPTION

With a wet bucket for sand, gravel, concrete and more, the DK2 POWER OPD811 self-drive electric powered hydraulic dump cart runs for up to 6 hours on one charge with its 48V 20Ah battery and moves it all. Equipped with a hydraulic electric lift, this unit is capable of tipping its wet bucket 90 degrees vertically for easy unloading.

The OPD811 comes with throttle bar speed control and articulated floating rear wheels to keep your load level and steady. Moving around the job site is effortless with forward and reverse speeds of 6 MPH and dual front wheel drive to climb over rough terrain.

SPECIFICATION

BATTERY	48V 20Ah (4 x 12V series)
PAYLOAD CAPACITY	1,100 lb (499 kg)
DRIVE WHEELS & TIRES	All-terrain 4.00-8 Ø16" (Ø40.6cm) OD
REAR WHEELS & TIRES	Off-road 4.10-4 Ø10" (Ø25.4cm) OD on Ø5" (Ø12.7 cm) rims
MAX SPEED	6 mph (9.7 km/h)
RUN TIME	6 hrs
CHARGE TIME	5 hrs
BUCKET	8 ft³ (0.23 m³), 45 gal (170.3 L), sealed steel
DIMENSIONS	60" (L) x 40" (W) x 40" (H) 152.4 cm (L) x 101.6 cm (W) x 101.6 cm (H)
WEIGHT	572 lb (259 kg)
SHIPPING DIMENSIONS	54" (L) x 34" (W) x 32" (H) 137.2 cm (L) x 86.4 cm (W) x 81.3 cm (H)
SHIPPING WEIGHT	616 lb (279.4 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 48V 20Ah battery **1**
- 8 ft³ (0.23 m³) 45 gal (170.3 L) sealed steel wet bucket **2**
- All-terrain 4.00-8 Ø16" (Ø40.6 cm) OD front wheel drive tires, with electric drive up to 6 mph (9.7 km/h) and off-road 4.10-4 Ø10" (Ø25.4 cm) OD rear tires on Ø5" (Ø12.7 cm) rims to move effortlessly around job sites **3**
- Hydraulic electric lift cylinder to tip bucket to 90° vertical for easy unloading **4**
- Throttle bar speed control with articulated floating rear wheels keep your load level and steady
- Improved "magic brake" system to brake upon the release of the brake handle, making your hauls safe and secure **5**



660 LB 7 HP 208 CC GAS-POWERED DUMP CART

ITEM NUMBER

OPD813

UPC

827518036273

DESCRIPTION

The OPD813 660 lb Gas-Powered Dump Cart with Tracks is a tool that is designed to make heavy lifting and transport easier. Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine, with 3 forward gears and 1 reverse gear, this gas-powered dump cart can hold up to 660 pounds and has a gas rod tipping capability to make unloading quick and easy.

The cart also boasts 7.1-inch off-road tracks for versatile mobility, giving you the ability to traverse difficult terrain with ease. Made from heavy-duty UV powder coated steel, this cart is built to last and withstand harsh outdoor conditions. The detachable 40.1" x 33.9" x 8" bucket is perfect for carrying heavy loads, making it an ideal choice for those who need to transport materials over long distances.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
LOAD CAPACITY	660 lb (300 kg)
TRANSMISSION	3 forward gears, 1 reverse gear
DUMP MECHANISM	Gas rod driven
TRACKS	7.1" (18 cm) wide
BUCKET	40.1" (L) x 33.9" (W) x 8" (H) 101.9 cm (L) x 86.1 cm (W) x 20.3 cm (H)
CONSTRUCTION	Heavy-duty UV powder-coated steel
WEIGHT	401 lb (182 kg)
SHIPPING DIMENSIONS	45.7" (L) x 30.3" (W) x 34.3" (H) 116.1 cm (L) x 77 cm (W) x 87.1 cm (H)
SHIPPING WEIGHT	449.7 lb (204 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



1



2



3



4

FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Built to hold up to 660 lbs of weight, making it perfect for heavy-duty outdoor projects
- 3 forward gears and 1 reverse gear, this cart is easy to control and maneuver
- Gas rod tipping capability makes it easy to dump and unload heavy loads **2**
- 7.1" off-road tracks provide versatile mobility and can navigate rough terrain **3**
- The 40.1" x 33.9" x 8" bucket is detachable and perfect for carrying heavy loads **4**
- The cart is built with heavy-duty UV powder-coated steel, ensuring that it will last for years to come
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty





1100 LB 9.5 HP 277 CC GAS-POWERED HYDRAULIC DUMP CART

ITEM NUMBER

OPD814

UPC

827518036280

DESCRIPTION

The OPD814 1100 lb Gas-Powered Dump Cart with Tracks is the perfect solution to transport heavy loads with ease. Powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine and equipped with 3 forward gears and 1 reverse gear, this cart can hold up to 1100 lbs, making it ideal for a variety of tasks. The 2.4 GPM hydraulic tipping capability and 7.1" off-road tracks provide versatile mobility, allowing you to easily navigate through rough terrain. The integrated 37.4" x 26.8" (W) x 18.3" (H) bucket can carry heavy loads, and the cart is built with heavy-duty UV powder-coated steel, making it durable and long-lasting. Whether you're working on a construction site, a farm, or just need a reliable cart for your next DIY project, the OPD814 1100 lb Gas-Powered Dump Cart with Tracks is the perfect solution for all your needs.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH395 9.5 HP 277 cc
PAYLOAD CAPACITY	1,100 lb (499 kg)
TRANSMISSION	3 forward gears, 1 reverse gear
DUMP MECHANISM	Hydraulic driven
HYDRAULIC FLOW RATE	2.4 GPM (9 LPM)
TRACKS	7.1" (18 cm) wide
BUCKET	37.4" (L) x 26.8" (W) x 18.3" (H) 95 cm (L) x 68.1 cm (W) x 46.5 cm (H)
CONSTRUCTION	Heavy-duty UV powder-coated steel
WEIGHT	586.4 lb (266 kg)
SHIPPING DIMENSIONS	65.7" (L) x 30.3" (W) x 44.5" (H) 167 cm (L) x 77 cm (W) x 113 cm (H)
SHIPPING WEIGHT	679 lb (308 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine **1**
- Perfect for hauling heavy loads over rough terrain
- Capable of holding up to 1100 lbs, it is perfect for transporting heavy equipment and materials quickly and easily
- The 2.4 GPM hydraulic tipping capability makes it easy to unload, so you can get back to work quickly **2**
- 3 forward gears and 1 reverse gear, this dump cart is incredibly versatile and easy to maneuver, even over difficult terrain
- Extra-large integrated 37.4" x 26.8" x 18.3" bucket **3**
- The 7.1" off-road tracks provide excellent traction and mobility, even in muddy or wet conditions **4**
- Build with heavy-duty UV powder-coated steel, ensuring that it will last for years to come
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



DK2 TRAILERS showcase our dedication to versatility and durability. We manufacture and sell a range of trailers from 4X6 to 6X10, with our renowned 5X7 series leading the way. These multi-utility trailers are **designed to meet diverse transportation needs**, whether for personal, professional, or recreational use.

DK2 TRAILERS





4FT X 6FT SINGLE AXLE OPEN RAIL LANDSCAPE TRAILER

ITEM NUMBER

MMT4X6O

UPC


826518005623

DESCRIPTION

The MMT4X6O is specially designed for handling a variety of hauling tasks; the perfect solution designed to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded steel and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION

PAYLOAD CAPACITY	1,295 lb (587.4 kg)
GVWR	1,581.6 lb (717.4 kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tires on 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	36" (91.4 cm) square tube steel ramp and round tube steel exterior
RAILS	Open design, tubular steel
GATE	36" (91.4 cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9 cm (L) x 121.9 cm (W)
FLOOR HEIGHT	18" (45.7 cm)
HITCH HEIGHT	14" (35.6 cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1 cm (L) x 162.6 cm (W) x 66 cm (H)
WEIGHT	286.6 lb (130 kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1 cm (L) x 132.1 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	308.6 lb (140 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Tubular steel open rail design **1**
- Corrugated steel floor panel **2**
- 36" (91.4 cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler
- Includes all necessary paperwork for registration



3-IN-1 DESIGN





4FT X 6FT SINGLE AXLE OPEN RAIL GALVANIZED LANDSCAPE TRAILER

ITEM NUMBER
MMT4X6OG

UPC
827518008119

DESCRIPTION

The MMT4X6OG is designed for handling a variety of hauling tasks; the perfect solution to pull a trailer behind a small vehicle, truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded hot-dipped galvanized steel and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION

PAYLOAD CAPACITY	1,295 lb (587.4 kg)
GVWR	1,581.6 lb (717.4 kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tires on 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
RAILS	Open design, tubular steel
GATE	36" (91.4 cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9 cm (L) x 121.9 cm (W)
FLOOR HEIGHT	18" (45.7 cm)
HITCH HEIGHT	14" (35.6 cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1 cm (L) x 162.6 cm (W) x 66 cm (H)
WEIGHT	286.6 lb (130 kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1 cm (L) x 132.1 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	308.6 lb (140 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Tubular steel open rail design **1**
- Corrugated steel floor panel **2**
- 36" (91.4 cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler
- Includes all necessary paperwork for registration



3-IN-1 DESIGN



4FT X 8FT SINGLE AXLE FOLDING UTILITY TRAILER

ITEM NUMBER

MFT4X8

UPC

827518007150

DESCRIPTION

The trailer you've always needed has arrived with the DK2 MFT4X8 folding trailer kit. High-performing, durable and versatile, this trailer is ready for work. Built with a patented welded steel frame and deck for added strength and easy assembly, you'll spend less time reading manuals and more time on the road. The DK2 MFT4X8 is coated with high-performance anti-slip textured UV powder, all while maintaining its complete folding functionality. When it comes to trailers – there's truly nothing like it.

SPECIFICATION

PAYLOAD CAPACITY	1,450 lb (657.7 kg)
GVWR	1,787.3 lb (810.7 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply tire, 80 PSI (5.5 Bar) cold
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
RAILS	Open design, tubular steel (sold separately)
FLOORING	Solid steel, anti-slip textured UV powder coated steel
LIGHTING	Pre-wired, Quick-connect D.O.T LED with flat 4-wire harness and connector
BED DIMENSIONS	96" (L) x 48" (W) 243.8 cm (L) x 121.9 cm (W)
DIMENSIONS	135" (L) x 62.3" (W) x 20" (H) 342.9 cm (L) x 158.2 cm (W) x 50.8 cm (H)
WEIGHT	337.3 lb (153 kg)
SHIPPING DIMENSIONS	48.4" (L) x 62.2" (W) x 7.9" (H) 122.9 cm (L) x 158 cm (W) x 20.1 cm (H)
SHIPPING WEIGHT	368.2 lb (167 kg)
WARRANTY	1-year limited



FEATURES

- Folding design to fit into compact spaces vertically **1**
- Constructed with fully welded heavy-duty UV powder coated tubular steel
- Solid steel bed with high-performance anti-slip textured UV powder coating **2**
- 5.30-12 6-ply tires **3**
- Trolley wheels for easy stowaway transport while folded **4**
- Pre-wired quick-connect D.O.T. LED lighting with flat 4-wire harness and connector
- 2" (5.08 cm) coupler with safety chain and S-hook
- 8 stake holes for the MFT4X8RK fully welded tubular steel open rail kit **(sold separately)** **5**
- Includes all necessary paperwork for registration



FOLDING DESIGN



4FT X 8FT SINGLE AXLE GALVANIZED FOLDING UTILITY TRAILER

ITEM NUMBER

MFT4X8G

UPC

827518009482

DESCRIPTION

The trailer you've always needed has arrived with the DK2 MFT4X8G folding trailer kit. High-performing, durable and versatile, this trailer is ready for work. Built with a patented welded steel frame and deck for added strength and easy assembly, you'll spend less time reading manuals and more time on the road. The DK2 MFT4X8G is coated with high-performance hot-dipped galvanized steel, all while maintaining its complete folding functionality. When it comes to trailers – there's truly nothing like it.

SPECIFICATION

PAYLOAD CAPACITY	1,450 lb (657.7 kg)
GVWR	1,787.3 lb (810.7 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply tire, 80 PSI (5.5 Bar) cold
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
RAILS	Open design, tubular steel (sold separately)
FLOORING	Solid steel, anti-slip textured
LIGHTING	Pre-wired, Quick-connect D.O.T LED with flat 4-wire harness and connector
BED DIMENSIONS	96" (L) x 48" (W) 243.8 cm (L) x 121.9 cm (W)
DIMENSIONS	135" (L) x 62.3" (W) x 20" (H) 342.9 cm (L) x 158.2 cm (W) x 50.8 cm (H)
WEIGHT	337.3 lb (153 kg)
SHIPPING DIMENSIONS	48.4" (L) x 62.2" (W) x 7.9" (H) 122.9 cm (L) x 158 cm (W) x 20.1 cm (H)
SHIPPING WEIGHT	368.2 lb (167 kg)
WARRANTY	1-year limited




FEATURES

- Folding design to fit into compact spaces vertically **1**
- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Solid galvanized steel bed **2**
- 5.30-12 6-ply tires **3**
- Trolley wheels for easy stowaway transport while folded **4**
- Pre-wired quick-connect D.O.T LED lighting with flat 4-wire harness and connector
- 2" (5.08 cm) coupler with safety chain and S-hook
- 8 stake holes for the MFT4X8RK fully welded tubular steel open rail kit **(sold separately)** **5**
- Includes all necessary paperwork for registration



FOLDING DESIGN

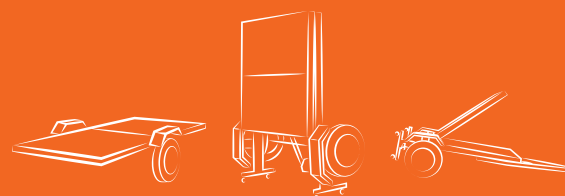



4.5FT X 7.5FT SINGLE AXLE MULTI-UTILITY TRAILER

ITEM NUMBER

MMT5X7

UPC

826518003391

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. When the front and back load-bearing gates are down, the trailer bed extends to nearly 12 feet in length, and the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION

PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,073 lb (940.3 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
DROP GATES	24" (61 cm) load-bearing corrugated reinforced steel
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	434.3 lb (197 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	458.6 lb (208 kg)
WARRANTY	1-year limited




FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1** and side panels **2**
- 24" (61 cm) load-bearing corrugated steel drop gates, extending the length of the trailer to 11.3 ft (3.4 m) **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration



5-IN-1 DESIGN

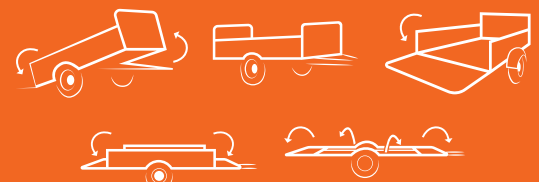



4.5FT X 7.5FT SINGLE AXLE MULTI-UTILITY TRAILER WITH DRIVE-UP GATE

ITEM NUMBER
MMT5X7-DUG


UPC
826518005296

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. This trailer comes with a 24-inch front load-bearing gate, 40-inch rear drive-up gate, and a tilt/dump capability that makes it easy to load or unload. Made with 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION

PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,143.9 lb (972.5 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
GATES	40" (101.6 cm) expanded mesh and tubular steel rear ramp gate and 24" (61 cm) load-bearing corrugated reinforced steel front gate
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	504.9 lb (229 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	537.9 lb (244 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1** and side panels **2**
- 40" (101.6 cm) expanded mesh and tubular steel rear ramp gate **3**
- 24" (61 cm) load-bearing corrugated steel front drop gate
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration



5-IN-1 DESIGN





4.5FT X 7.5FT SINGLE AXLE MULTI-UTILITY GALVANIZED TRAILER

ITEM NUMBER

MMT5X7G

UPC


826518004848

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. When the front and back load-bearing gates are down, the trailer bed extends to nearly 12 feet in length, and the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION

PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,073 lb (940.3 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
DROP GATES	24" (61 cm) load-bearing corrugated reinforced steel
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	434.3 lb (197 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	458.6 lb (208 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Corrugated reinforced steel floor panel **1** and side panels **2**
- 24" (61 cm) load-bearing corrugated steel drop gates, extending the length of the trailer to 11.3 ft (3.4 m) **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration



5-IN-1 DESIGN



4.5FT X 7.5FT SINGLE AXLE MULTI-UTILITY GALVANIZED TRAILER WITH DRIVE-UP GATE

ITEM NUMBER

MMT5X7G-DUG

UPC



826518005302

DESCRIPTION

This multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid cambered axle with 12-inch tires and a load capacity of 1,639 pounds. Equipped with a 24-inch front load-bearing gate, 40-inch rear drive-up gate, and a tilt/dump capability that makes it easy to load or unload. Fabricated from 100% hot-dipped galvanized steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION

PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,143.9 lb (972.5 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
SIDE PANELS	Corrugated reinforced steel
GATES	40" (101.6 cm) expanded mesh and tubular steel rear ramp gate and 24" (61 cm) load-bearing corrugated reinforced steel front gate
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	504.9 lb (229 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	537.9 lb (244 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized steel
- Corrugated reinforced steel floor panel **1** and side panels **2**
- 40" (101.6 cm) expanded mesh and tubular steel rear ramp gate **3**
- 24" (61 cm) load-bearing corrugated steel front drop gate
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration



5-IN-1 DESIGN



6FT X 10FT SINGLE AXLE OPEN RAIL UTILITY TRAILER

ITEM NUMBER

MMT6X10

UPC

826518005593

DESCRIPTION


Introducing the new MMT6X10 single axle open rail utility trailer, the largest in DK2's collection. Constructed with fully welded heavy-duty powder-coated tubular steel with a corrugated steel panel floor, you can count on this trailer to deliver long lasting reliability for all your hauling needs. It has a payload capacity of 1,950 pounds and sits on a solid square tube cambered axle equipped with D.O.T. 14-inch 175/80R14 tires. Load and unload this trailer with ease using the included 48-inch drive-up gate.

SPECIFICATION


PAYLOAD CAPACITY	1,950lb (884.5kg)
GVWR	2,590lb (1,174.8kg)
WHEELS & TIRES	14" (35.6cm) D.O.T. 175/80R14 bias tires
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Open design, tubular steel
GATE	49.3" (125.2cm) tubular and expanded mesh steel ramp
FLOORING	Corrugated reinforced steel panels
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	120" (L) x 72" (W) 304.8cm (L) x 182.9cm (W)
FLOOR HEIGHT	20.2" (51.3cm)
HITCH HEIGHT	18.2" (46.2cm)
DIMENSIONS	166.1" (L) x 83.9" (W) x 71.1" (H) 421.9cm (L) x 213.1cm (W) x 180.6cm (H)
WEIGHT	640lb (290.3kg)
SHIPPING DIMENSIONS	83.1" (L) x 74" (W) x 10.2" (H) 211.1cm (L) x 188cm (W) x 25.9cm (H)
SHIPPING WEIGHT	650.4lb (295kg)
WARRANTY	1-year limited



1



2



3



4



5

FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Tubular steel open rail design **2**
- 49.3" (125.2cm) tubular and expanded mesh steel rear ramp gate **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- 14" (35.6cm) D.O.T. 175/80R14 bias tires **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration





1100 LB POLY ATV TRAILER

ITEM NUMBER

MMT-ATV

UPC

827518009499

DESCRIPTION

Looking for a durable ATV trailer that can handle any terrain? Look no further than the MMTATV 1100 lb ATV Trailer. With a massive capacity of 1100lbs, you can easily transport heavy loads wherever you need to go. Made from high-quality poly and steel frame, this trailer is built to last.

The 18-inch tires provide excellent traction and stability, while the 11.8-inch hitch height and 16.5-inch trailer to ground clearance make it easy to attach to your lawn tractor or ATV. The large bucket on this trailer ensures that you have plenty of space to transport your equipment or material.

With the MMTATV 1100 lb ATV Trailer, you can transport your equipment with ease and get the job done.

SPECIFICATION


PAYLOAD CAPACITY	1,100 lb (499 kg)
TIRES	18" (45.7 cm)
MATERIAL	High-quality poly bucket and steel frame
DUMP BED	2-position with quick-release pin
BALL/COUPLER SIZE	2" (5.08 cm)
DIMENSIONS	64.2" (L) x 46.3" (W) x 29.3" (H) 163 cm (L) x 117.5 cm (W) x 74.5 cm (H)
WEIGHT	103.6 lb (47 kg)
SHIPPING DIMENSIONS	50" (L) x 33.1" (W) x 12.6" (H) 127 cm (L) x 84 cm (W) x 32 cm (H)
WARRANTY	1-year limited



FEATURES

- Constructed with high-quality poly and steel **1**
- Easily transport heavy loads with the 1,100 lb carrying capacity
- Take your trailer wherever you need to go with its 18" tires, providing excellent traction and stability **2**
- The 11.8" hitch height and 16.5" trailer to ground clearance make it easy to attach to your lawn tractor or ATV **3**
- The large bucket ensures plenty of space to transport equipment or material around the job site **4**
- Includes 1-year limited DK2 warranty





DK2 WINCHES represent our commitment to reliability and performance. We manufacture and sell a wide range of winches, including **ATV/UTV, 4X4, Heavy-Duty, and Industrial models.** Each winch is designed to meet the rigorous demands of various applications, from recreational off-roading to heavy industrial use.

2,500 LB ELECTRIC ATV WINCH

ITEM NUMBER

C2500N

UPC

826518004619

DESCRIPTION

Conquer any terrain with the DK2 2,500 lb Electric ATV Winch. Armed with a robust 1.1 hp motor, 153:1 gear ratio, and 50-ft steel cable, it tackles the toughest pulls. IP65 waterproof and dustproof, with a load-holding brake, and backed by limited lifetime gear and 3-year electrical warranties.

SPECIFICATION

SINGLE RATED LINE PULL	2,500 lb (1,134 kg)
MOTOR	12V DC 1.1 hp permanent magnet
CONTROL	Wired handlebar rocker switch
GEAR TRAIN	Differential planetary
GEAR REDUCTION RATIO	153:1
BRAKING	Automatic load-holding brake
DRUM SIZE	1.2" x 2.8" (31.5 mm x 71.9 mm)
CABLE	Ø0.16" x 50 ft. (Ø4.1 mm x 15.2 m)
BATTERY	12V DC (minimum 12 Ah)
MOUNTING PATTERN	3.15" (80 mm)
DIMENSIONS	11.1" (L) x 4.6" (W) x 4.2" (H) 28.2 cm (L) x 11.7 cm (W) x 10.7 cm (H)
WEIGHT	17.9 lb (8.1 kg)
SHIPPING DIMENSIONS	13.5" (L) x 10.8" (W) x 4.3" (H) 34.2 cm (L) x 27.5 cm (W) x 11 cm (H)
SHIPPING WEIGHT	22.9 lb (10.4 kg)
WARRANTY	Limited lifetime gear train, 3-year electrical

FIRST LAYER PERFORMANCE

LINE PULL LB [KG]	LINE SPEED FT/MIN [M/MIN]	CURRENT AMPS [12V DC]
0	13.3 (4.1)	10
1,000 (454)	8.3 (2.5)	55
2,000 (907)	4.1 (1.2)	106
2,500 (1,134)	2.7 (0.8)	132

LAYER	RATED LINE PULL LB [KG]	TOTAL ROPE ON DRUM FT [M]
1	2,500 (1,134)	6 ft. (1.8 m)
2	2,045 (928)	13.3 ft. (4 m)
3	1,731 (785)	21.9 ft. (6.7 m)
4	1,500 (680)	31.8 ft. (9.7 m)
5	1,324 (600)	43.1 ft. (13.1 m)
6	1,184 (537)	50 ft. (15.2 m)



FEATURES

- Includes limited lifetime gear train warranty and 3-year electrical warranty
- Pulls up to 2,500 lb (1,134 kg)
- Driven by a powerful 12V DC 1.1 hp permanent magnet motor, perfect for ATV use **1**
- Features differential planetary gearing with a 153:1 gear ratio providing fast line speeds
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Equipped with a 50-foot galvanized steel aircraft cable, a 4-way roller fairlead with nylon bushings **2**, and a free spool clutch for fast line-out
- 12 ft. wired handlebar rocker switch, offering ease of operation
- IP65 waterproof and dust proof rating on the winch and wired rocker switch
- Overload protected
- Includes steel cable, heavy-duty 1/4" hook, 4-way roller fairlead, stainless steel hardware, mounting bracket, and wired rocker switch **3**



3,500 LB ELECTRIC ATV/UTV WINCH

ITEM NUMBER C3500N
UPC 826518004626

ITEM NUMBER C3500N-SR
UPC 826518005241

DESCRIPTION

Unleash power with the DK2 3,500 lb Electric ATV/UTV Winch. Driven by a 1.3 hp motor and 170:1 gear ratio, it pulls up to 3,500 lbs. Featuring a 50-ft steel cable, planetary gearing, and load-holding brake. IP68 rated, with a lifetime gear train and 3-year electrical warranty.

SPECIFICATION

SINGLE RATED LINE PULL	3,500 lb (1,587 kg)
MOTOR	12V DC 1.3 hp permanent magnet
CONTROL	Wired handlebar rocker switch
GEAR TRAIN	Differential planetary
GEAR REDUCTION RATIO	170:1
BRAKING	Automatic load-holding brake
DRUM SIZE	1.5" x 3.35" (38 mm x 82 mm)
CABLE/ROPE	ST: Ø0.2" x 50 ft. (Ø5.1 mm x 15.2 m) SR: Ø0.22" x 50 ft. (Ø5.6 mm x 15.2 m)
BATTERY	12V DC (minimum 12 Ah)
MOUNTING PATTERN	4.9" x 3" (124 mm x 76 mm)
DIMENSIONS	12.5" (L) x 4.6" (W) x 4.3" (H) 31.8 cm (L) x 11.7 cm (W) x 10.9 cm (H)
WEIGHT	ST: 19.8 lb (9 kg) SR: 18.4 lb (8.3 kg)
SHIPPING DIMENSIONS	14.6" (L) x 11.6" (W) x 4.7" (H) 37.2 cm (L) x 29.5 cm (W) x 12 cm (H)
SHIPPING WEIGHT	ST: 24.8 lb (11.2 kg) SR: 23.4 lb (10.6 kg)
WARRANTY	Limited lifetime gear train, 3-year electrical

**FIRST LAYER
PERFORMANCE**

LINE PULL LB [KG]	LINE SPEED FT/MIN [M/MIN]	CURRENT AMPS [12V DC]
0	12 (3.6)	10
1,500 (680)	9.2 (2.8)	75
2,500 (1,134)	7 (2.1)	125
3,500 (1,588)	4.5 (1.4)	197

LAYER	RATED LINE PULL LB [KG]	TOTAL ROPE ON DRUM FT [M]
1	3,500 (1,588)	5.6 (1.7)
2	2,785 (1,263)	13.8 (4.2)
3	2,312 (1,049)	23.3 (7.1)
4	1,977 (897)	34.8 (10.6)
5	1,726 (783)	47.9 (14.6)
6	1,532 (695)	50 (15.2)



FEATURES

- Includes limited lifetime gear train warranty and 3-year electrical warranty
- Pulls up to 3,500 lb (1,587 kg)
- Driven by a powerful 12V DC 1.3 hp permanent magnet motor, perfect for ATV/UTV use **1**
- Features differential planetary gearing with a 170:1 gear ratio providing fast line speeds
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Equipped with a 50-foot galvanized steel aircraft cable or synthetic rope, a 4-way roller fairlead **2** or hawse fairlead, and a free spool clutch **3**
- 12 ft. wired handlebar rocker switch, offering ease of operation
- IP68 waterproof and dust proof rating on the winch, and IP65 rated wired rocker switch
- Overload protected
- Includes steel cable, heavy-duty 1/4" hook, 4-way roller or hawse fairlead, stainless steel hardware, mounting bracket, and wired rocker switch



C5500N-SR
C5500N

5,500 LB ELECTRIC ATV/UTV WINCH

ITEM NUMBER C5500N
UPC 827518053782

ITEM NUMBER C5500N-SR
UPC 827518053799

DESCRIPTION

Unleash power with the DK2 5,500 lb Electric ATV/UTV Winch. Driven by a 1.5 hp motor and 201:1 gear ratio, it pulls up to 5,500 lbs. Features a 50-ft steel cable or synthetic rope, 3-stage planetary gearing, and load-holding brake. IP68 rated with lifetime gear train and 3-year electrical warranties.

SPECIFICATION

SINGLE RATED LINE PULL	5,500 lb (2,494 kg)
MOTOR	12V DC 1.5 hp permanent magnet
CONTROL	Wired handlebar rocker switch
GEAR TRAIN	3-stage planetary
GEAR REDUCTION RATIO	201:1
BRAKING	Automatic load-holding brake
DRUM SIZE	2" x 5" (50 mm x 127 mm)
CABLE/ROPE	ST: Ø0.25" x 50 ft. (Ø6.4 mm x 15.2 m) SR: Ø0.25" x 50 ft. (Ø6.4 mm x 15.2 m)
BATTERY	12V DC (minimum 20 Ah)
MOUNTING PATTERN	3" x 6.6" (76 mm x 167 mm)
DIMENSIONS	15.3" (L) x 4.7" (W) x 4.6" (H) 38.9 cm (L) x 11.9 cm (W) x 11.7 cm (H)
WEIGHT	ST: 32.6 lb (14.8 kg) SR: 21.5 lb (9.8 kg)
SHIPPING DIMENSIONS	20.9" (L) x 12.6" (W) x 6.3" (H) 53.2 cm (L) x 32 cm (W) x 16 cm (H)
SHIPPING WEIGHT	ST: 37.6 lb (17.1 kg) SR: 26.5 lb (12 kg)
WARRANTY	Limited lifetime gear train, 3-year electrical

FIRST LAYER PERFORMANCE

LINE PULL LB [KG]	LINE SPEED FT/MIN [M/MIN]	CURRENT AMPS [12V DC]
0	15.3 (4.7)	23
1,500 (680)	9 (2.7)	80
2,500 (1,134)	8 (2.4)	100
3,500 (1,587)	7 (2.1)	125
4,500 (2,041)	6 (1.8)	160
5,500 (2,495)	5 (1.5)	200

LAYER	RATED LINE PULL LB [KG]	TOTAL ROPE ON DRUM FT [M]
1	5,500 (2,494)	12 (3.5)
2	4,483 (2,033)	25 (7.6)
3	3,783 (1,716)	41 (12.2)
4	3,272 (1,484)	50 (15.2)



FEATURES

- Includes limited lifetime gear train warranty and 3-year electrical warranty
- Pulls up to 5,500 lb (2,494 kg)
- Driven by a powerful 12V DC 1.5 hp permanent magnet motor, perfect for ATV/UTV use ¹
- Features 3-stage planetary gearing with a 201:1 gear ratio providing fast line speeds
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Equipped with a 50-foot galvanized steel aircraft cable or synthetic rope, a 4-way roller fairlead ² or hawse fairlead, and a free spool clutch ³
- 12 ft. wired handlebar rocker switch, offering ease of operation
- IP68 waterproof and dust proof rating on the winch, and IP65 rated wired rocker switch
- Overload protected
- Includes steel cable, heavy-duty 5/16" hook, 4-way roller or hawse fairlead, stainless steel hardware, mounting bracket, and wired rocker switch



8,000 LB PREMIUM ELECTRIC 4X4 WINCH

ITEM NUMBER S8000
UPC 826518003247

ITEM NUMBER S8000-SR
UPC 826518003179

DESCRIPTION

Powerful, wireless, and reliable. With an 8,000 lb pull, 5.5 hp motor, and compact design, it delivers precise and safe off-road winching. Backed by a limited lifetime gear train warranty and a 7-year electrical warranty, it's your trusted companion for adventures.

SPECIFICATION

SINGLE RATED LINE PULL	8,000 lb (3,628 kg)
MOTOR	5.5 hp / 4.2 kW series-wound
CONTROL	Wireless / wired remote control
GEAR TRAIN	3-stage planetary
GEAR REDUCTION RATIO	180:1
BRAKING	Automatic load-holding brake
DRUM SIZE	2.5" x 8.8" (63.5 mm x 224 mm)
CABLE/ROPE	ST: Ø0.3" x 80.1 ft (Ø8.1 mm x 24.4 m) SR: Ø0.33" x 80.1 ft (Ø8.5 mm x 24.4 m)
BATTERY	650 CCA (recommended)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114.3 mm)
DIMENSIONS	22.8" (L) x 10" (W) x 6.5" (H) 58 cm (L) x 25.3 cm (W) x 16.5 cm (H)
WEIGHT	ST: 83.8 lb (38 kg) SR: 65 lb (29.5 kg)
SHIPPING DIMENSIONS	25.7" (L) x 13.2" (W) x 12.9" (H) 65.3 cm (L) x 33.5 cm (W) x 32.8 cm (H)
SHIPPING WEIGHT	ST: 90.4 lb (41 kg) SR: 71.6 lb (32.5 kg)
WARRANTY	Limited lifetime gear train, 7-year electrical

FIRST LAYER
PERFORMANCE

LINE PULL LB [KG]	LINE SPEED FT/MIN [M/MIN]	CURRENT AMPS
0	32.7 (10)	65
3,000 (1,360)	11.8 (3.6)	180
6,000 (2,727)	7.8 (2.4)	270
8,000 (3,628)	6.3 (1.9)	345

LAYER	RATED LINE PULL LB [KG]	TOTAL ROPE ON DRUM FT [M]
1	8,000 (3,628)	16.2 (5)
2	6,493 (2,945)	39 (12)
3	5,464 (2,478)	68.9 (21.6)
4	4,720 (2,141)	79 (24)



FEATURES

- Includes limited lifetime gear train warranty and 7-year electrical warranty
- Pulls up to 8,000 lb (3,628 kg)
- 5.5 hp / 4.2 kW series wound motor, delivering high torque and performance
- Wireless and wired remote control **1**
- 3-stage planetary gear train, achieving a balance of speed and power
- Freespool clutch to free up the drum for quicker recovery preparation
- 180:1 gear reduction ratio maximizes pulling power, making the winch highly effective in overcoming resistance
- IP68 rated and corrosion resistant, built with stainless steel hardware and UV powder-coated
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**



9,500 LB PREMIUM ELECTRIC 4X4 WINCH

ITEM NUMBER S9500
UPC 826518003254

ITEM NUMBER S9500-SR
UPC 826518003186

DESCRIPTION

Powerful, wireless, and reliable. With a 9,500 lb pull, 5.5 hp motor, and compact design, it delivers precise and safe off-road winching. Backed by a limited lifetime gear train warranty and a 7-year electrical warranty, it's your trusted companion for adventures.

SPECIFICATION

SINGLE RATED LINE PULL	9,500 lb (4,309 kg)
MOTOR	5.5 hp / 4.2 kW series-wound
CONTROL	Wireless / wired remote control
GEAR TRAIN	3-stage planetary
GEAR REDUCTION RATIO	180:1
BRAKING	Automatic load-holding brake
DRUM SIZE	2.5" x 8.8" (63.5 mm x 224 mm)
CABLE/ROPE	ST/SR: Ø0.35" x 80.1 ft (Ø9 mm x 24.4 m)
BATTERY	650 CCA (recommended)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114.3 mm)
DIMENSIONS	22.8" (L) x 10" (W) x 6.5" (H) 58 cm (L) x 25.3 cm (W) x 16.5 cm (H)
WEIGHT	ST: 88.2 lb (40 kg) SR: 65.2 lb (29.6 kg)
SHIPPING DIMENSIONS	25.7" (L) x 13.2" (W) x 12.9" (H) 65.3 cm (L) x 33.5 cm (W) x 32.8 cm (H)
SHIPPING WEIGHT	ST: 94.8 lb (43 kg) SR: 65.2 lb (29.6 kg)
WARRANTY	Limited lifetime gear train, 7-year electrical

FIRST LAYER PERFORMANCE	LINE PULL LB [KG]	LINE SPEED FT/MIN [M/MIN]	CURRENT AMPS
	0	32.7 (10)	65
	3,000 (1,360)	11.8 (3.6)	180
	6,000 (2,727)	7.8 (2.4)	270
	9,500 (4,309)	5 (1.6)	365

LAYER	RATED LINE PULL LB [KG]	TOTAL ROPE ON DRUM FT [M]
1	9,500 (4,309)	16.3 (5)
2	7,700 (3,493)	39.3 (12)
3	6,500 (2,948)	65.6 (20)
4	5,610 (2,545)	79 (24)



FEATURES

- Includes limited lifetime gear train warranty and 7-year electrical warranty
- Pulls up to 9,500 lb (4,309 kg)
- 5.5 hp / 4.2 kW series wound motor, delivering high torque and performance
- Wireless and wired remote control **1**
- 3-stage planetary gear train, achieving a balance of speed and power
- Freespool clutch to free up the drum for quicker recovery preparation
- 180:1 gear reduction ratio maximizes pulling power, making the winch highly effective in overcoming resistance
- IP68 rated and corrosion resistant, built with stainless steel hardware and UV powder-coated
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**



12,000 LB PREMIUM ELECTRIC 4X4 WINCH

ITEM NUMBER S12000
UPC 826518003261

ITEM NUMBER S12000-SR
UPC 826518003193

DESCRIPTION

Powerful, wireless, and reliable. With a 12,000 lb pull, 6 hp motor, and compact design, it delivers precise and safe off-road winching. Backed by a limited lifetime gear train warranty and a 7-year electrical warranty, it's your trusted companion for adventures.


SPECIFICATION

SINGLE RATED LINE PULL	12,000 lb (5,443 kg)
MOTOR	6 hp / 4.5 kW series-wound
CONTROL	Wireless / wired remote control
GEAR TRAIN	3-stage planetary
GEAR REDUCTION RATIO	218:1
BRAKING	Automatic load-holding brake
DRUM SIZE	2.5" x 8.8" (63.5 mm x 224 mm)
CABLE/ROPE	ST/SR: Ø0.37" x 80.1 ft (Ø9.5 mm x 24.4 m)
BATTERY	650 CCA (recommended)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114.3 mm)
DIMENSIONS	22.8" (L) x 10" (W) x 6.5" (H) 58 cm (L) x 25.3 cm (W) x 16.5 cm (H)
WEIGHT	ST: 90.4 lb (41 kg) SR: 67.2 lb (30.5 kg)
SHIPPING DIMENSIONS	25.7" (L) x 13.2" (W) x 12.9" (H) 65.3 cm (L) x 33.5 cm (W) x 32.8 cm (H)
SHIPPING WEIGHT	ST: 97 lb (44 kg) SR: 73.8 lb (33.5 kg)
WARRANTY	Limited lifetime gear train, 7-year electrical

FIRST LAYER
PERFORMANCE

LINE PULL LB (KG)	LINE SPEED FT/MIN (M/MIN)	CURRENT AMPS
0	29.4 (9)	65
3,000 (1,360)	12.4 (3.8)	155
6,000 (2,727)	8.2 (2.5)	220
9,000 (4,082)	6.2 (1.9)	295
12,000 (5,443)	4.7 (1.5)	370

LAYER	RATED LINE PULL LB (KG)	TOTAL ROPE ON DRUM FT (M)
1	12,000 (5,443)	16.3 (5)
2	9,210 (4,177)	37 (11.2)
3	8,030 (3,642)	61 (18.6)
4	6,894 (3,127)	79 (24)



FEATURES

- Includes limited lifetime gear train warranty and 7-year electrical warranty
- Pulls up to 12,000 lb (5,443 kg)
- 6 hp / 4.5 kW series wound motor, delivering high torque and performance
- Wireless and wired remote control **1**
- 3-stage planetary gear train, achieving a balance of speed and power
- Freespool clutch to free up the drum for quicker recovery preparation
- 218:1 gear reduction ratio maximizes pulling power, making the winch highly effective in overcoming resistance
- IP68 rated and corrosion resistant, built with stainless steel hardware and UV powder-coated
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**





17,500 LB PREMIUM ELECTRIC HEAVY-DUTY WINCH

ITEM NUMBER S17500
UPC 826518003209

ITEM NUMBER S17500-SR
UPC 827518008096

DESCRIPTION

Heavy-duty, and even more powerful. With a 17,500 lb pull, 6 hp motor, and wireless/wired remote, it ensures efficient operation with its precision-engineered 3-stage planetary gearing. Backed by a limited lifetime gear train warranty and a 7-year electrical warranty.

SPECIFICATION

SINGLE RATED LINE PULL	17,500 lb (7,937.9 kg)
MOTOR	6 hp / 4.5 kW series-wound
CONTROL	Wireless / wired remote control
GEAR TRAIN	3-stage planetary
GEAR REDUCTION RATIO	432:1
BRAKING	Automatic load-holding brake
DRUM SIZE	3.5" x 10.5" (88 mm x 266 mm)
CABLE/ROPE	ST: Ø0.47" x 82 ft (Ø12 mm x 25 m) SR: Ø0.47" x 85.3 ft (Ø12 mm x 26 m)
BATTERY	650 CCA (recommended)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114 mm)
DIMENSIONS	22" (L) x 7.7" (W) x 11.2" (H) 55.9 cm (L) x 19.6 cm (W) x 28.4 cm (H)
WEIGHT	ST: 111.9 lb (50.8 kg) SR: 88 lb (39.9 kg)
SHIPPING DIMENSIONS	24.2" (L) x 13.4" (W) x 13.8" (H) 61.5 cm (L) x 34 cm (W) x 35.1 cm (H)
SHIPPING WEIGHT	ST: 134.8 lb (61.1 kg) SR: 102.6 lb (46.5 kg)
WARRANTY	Limited lifetime gear train, 7-year electrical



FEATURES

- Includes limited lifetime gear train warranty and 7-year electrical warranty
- Pulls up to 17,500 lb (7,937.9 kg)
- 6 hp / 4.5 kW series wound motor, delivering high torque and performance
- Wireless and wired remote control
- 3-stage planetary gear train, achieving a balance of speed and power
- Freespool clutch to free up the drum for quicker recovery preparation **1**
- 432:1 gear reduction ratio maximizes pulling power, making the winch highly effective in overcoming resistance
- IP67 rated and corrosion resistant, built with stainless steel hardware and UV powder-coated
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**

FIRST LAYER PERFORMANCE

LINE PULL LB (KG)	LINE SPEED FT/MIN (M/MIN)	CURRENT AMPS
0	18 (5.5)	75
4,400 (2,000)	7.5 (2.3)	175
8,800 (4,000)	5.3 (1.6)	260
13,200 (6,000)	4.4 (1.35)	330
17,500 (7,955)	3.4 (1.05)	390

LAYER	RATED LINE PULL lb (kg)	TOTAL ROPE ON DRUM ft (m)
1	17,500 (7,955)	18.02 (5.49)
2	14,240 (6,472)	40.3 (12.3)
3	12,005 (5,456)	66.8 (20.4)
4	10,376 (4,716)	82 (25)





20,000 LB PREMIUM ELECTRIC HEAVY-DUTY WINCH

ITEM NUMBER S20000
UPC 826518003216

ITEM NUMBER S20000-SR
UPC 826518005616

DESCRIPTION

Heavy-duty, and even more powerful. With a 20,000 lb pull, 6.5 hp motor, and wireless/wired remote, it ensures efficient operation with its precision-engineered 3-stage planetary gearing. Backed by a limited lifetime gear train warranty and a 7-year electrical warranty.

SPECIFICATION

SINGLE RATED LINE PULL	20,000 lb (9,071.8 kg)
MOTOR	6.5 hp / 4.8 kW series-wound
CONTROL	Wireless / wired remote control
GEAR TRAIN	3-stage planetary
GEAR REDUCTION RATIO	544:1
BRAKING	Automatic load-holding brake
DRUM SIZE	3.5" x 10.5" (88 mm x 266 mm)
CABLE/ROPE	ST: Ø0.55" x 82 ft (Ø14 mm x 25 m) SR: Ø0.51" x 85.3 ft (Ø13 mm x 26 m)
BATTERY	650 CCA (recommended)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114 mm)
DIMENSIONS	22" (L) x 7.7" (W) x 11.2" (H) 55.9 cm (L) x 19.6 cm (W) x 28.4 cm (H)
WEIGHT	ST: 129 lb (58.5 kg) SR: 91.2 lb (41.4 kg)
SHIPPING DIMENSIONS	24.2" (L) x 13.4" (W) x 13.8" (H) 61.5 cm (L) x 34 cm (W) x 35.1 cm (H)
SHIPPING WEIGHT	ST: 152.1 lb (69 kg) SR: 105.8 lb (48 kg)
WARRANTY	Limited lifetime gear train, 7-year electrical



FEATURES

- Includes limited lifetime gear train warranty and 7-year electrical warranty
- Pulls up to 20,000 lb (9,071.8 kg)
- 6.5 hp / 4.8 kW series wound motor, delivering high torque and performance
- Wireless and wired remote control
- 3-stage planetary gear train, achieving a balance of speed and power
- Freespool clutch to free up the drum for quicker recovery preparation **1**
- 544:1 gear reduction ratio maximizes pulling power, making the winch highly effective in overcoming resistance
- IP67 rated and corrosion resistant, built with stainless steel hardware and UV powder-coated
- Automatic load-holding brake enhances safety by securely holding the load, preventing unintended movement during pauses or power loss
- Fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**

FIRST LAYER PERFORMANCE

LINE PULL LB (KG)	LINE SPEED FT/MIN (M/MIN)	CURRENT AMPS
0	15.4 (4.7)	75
5,000 (2,272)	6.2 (1.9)	160
10,000 (4,545)	4.6 (1.4)	240
15,000 (6,818)	3.9 (1.2)	310
20,000 (9,071)	3 (0.9)	380

LAYER	RATED LINE PULL LB (KG)	TOTAL ROPE ON DRUM FT (M)
1	20,000 (9,071)	20.4 (6.2)
2	15,482 (7,037)	42.4 (12.9)
3	12,584 (5,720)	60.2 (18.6)
4	10,550 (4,795)	82 (25)





10,000 LB HYDRAULIC WINCH

ITEM NUMBER

10000NH

UPC

827518053218

DESCRIPTION

Meet the DK2 10,000 lb Hydraulic Winch – a robust solution for heavy loads. With a powerful 10,000 lb pull and hydraulic motor, it ensures reliable performance. The wired remote, 2-stage planetary gear train, and 33:1 ratio provide precision and efficiency. Safety is enhanced with the automatic brake, and the 9.1 mm x 26 m steel cable adds durability. Versatile mounting options (254 mm x 114 mm) make this winch a reliable, flexible choice for various applications. Enjoy peace of mind with a 3-year gear train warranty and a 3-year electrical warranty, reflecting the durability and confidence in the product's longevity.



SPECIFICATION

SINGLE RATED LINE PULL	10,000 lb (4,536 kg)
MOTOR	Hydraulic OMR-80
CONTROL	Wired
GEAR TRAIN	2-stage planetary
GEAR REDUCTION RATIO	33:1
BRAKING	Automatic
DRUM SIZE	3.5" x 8.8" (88 mm x 224 mm)
CABLE	Ø0.36" x 85.3 ft (Ø9.1 mm x 26 m)
MAX HYDRAULIC PRESSURE	1,450 PSI (10 MPa)
MAX HYDRAULIC FLOW	11.9 GPM (45 LPM)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114 mm)
DIMENSIONS	20.9" (L) x 7.8" (W) x 8.8" (H) 53.1 cm (L) x 19.8 cm (W) x 22.4 cm (H)
WEIGHT	102.3 lb (46.4 kg)
SHIPPING DIMENSIONS	23.6" (L) x 12.8" (W) x 15.4" (H) 59.9 cm (L) x 32.5 cm (W) x 39.1 cm (H)
SHIPPING WEIGHT	124.3 lb (56.4 kg)
WARRANTY	3-year gear train, 3-year electrical



FEATURES

- Includes 3-year gear train warranty and 3-year electrical warranty
- Pulls up to 10,000 lb (4,536 kg)
- Featuring an OMR-80 hydraulic motor, the winch offers reliable and efficient power delivery, suitable for extended and demanding usage scenarios
- Corrosion resistant
- Wired remote control provides precise and convenient operation ¹
- Equipped with a 2-stage planetary gear train, the winch achieves a balance between speed and power
- 33:1 gear reduction ratio enhances pulling power
- Handle latch clutch for free spooling and automatic load-holding brake to ensure safety by holding the load securely
- 0.36" (9.1 mm) diameter and 85.3 ft (26 m) length steel cable
- 10" (254 mm) x 4.5" (114 mm) mounting pattern, compatible with different mounting systems
- Roller fairlead designed to extend the life of your cable or rope ²
- High-strength, heavy-duty hook for your peace of mind ³



15,000 LB HYDRAULIC WINCH

ITEM NUMBER
15000NH

UPC
827518037126


DESCRIPTION

Meet the DK2 15,000 lb Hydraulic Winch – a robust solution for heavy loads. With a powerful 15,000 lb pull and hydraulic motor, it ensures reliable performance. The wired remote, 2-stage planetary gear train, and 33:1 ratio provide precision and efficiency. Safety is enhanced with the automatic brake, and the 14 mm x 24 m steel cable adds durability. Versatile mounting options (254 mm x 114 mm) make this winch a reliable, flexible choice for various applications. Enjoy peace of mind with a 3-year gear train warranty and a 3-year electrical warranty, reflecting the durability and confidence in the product's longevity.



SPECIFICATION

SINGLE RATED LINE PULL	15,000 lb (6,803.9 kg)
MOTOR	Hydraulic OMR-100
CONTROL	Wired
GEAR TRAIN	2-stage planetary
GEAR REDUCTION RATIO	33:1
BRAKING	Automatic
DRUM SIZE	3.5" x 8.8" (88 mm x 224 mm)
CABLE	Ø0.55" x 78.7 ft (Ø14 mm x 24 m)
MAX HYDRAULIC PRESSURE	2,030 PSI (14 MPa)
MAX HYDRAULIC FLOW	15.9 GPM (60 LPM)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114 mm)
DIMENSIONS	20.9" (L) x 7.8" (W) x 8.8" (H) 53.1 cm (L) x 19.8 cm (W) x 22.4 cm (H)
WEIGHT	113.8 lb (51.6 kg)
SHIPPING DIMENSIONS	23.6" (L) x 12.8" (W) x 15.4" (H) 59.9 cm (L) x 32.5 cm (W) x 39.1 cm (H)
SHIPPING WEIGHT	135.6 lb (61.5 kg)
WARRANTY	3-year gear train, 7-year electrical



FEATURES

- Includes 3-year gear train warranty and 3-year electrical warranty
- Pulls up to 15,000 lb (6,803.9 kg)
- Featuring an OMR-100 hydraulic motor, the winch offers reliable and efficient power delivery, suitable for extended and demanding usage scenarios
- Corrosion resistant
- Wired remote control provides precise and convenient operation **1**
- Equipped with a 2-stage planetary gear train, the winch achieves a balance between speed and power
- 33:1 gear reduction ratio enhances pulling power
- Handle latch clutch for free spooling and automatic load-holding brake to ensure safety by holding the load securely
- 0.55" (14 mm) diameter and 78.7 ft (24 m) length steel cable
- 10" (254 mm) x 4.5" (114 mm) mounting pattern, compatible with different mounting systems
- Roller fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**



20,000 LB HYDRAULIC WINCH

ITEM NUMBER

20000NH

UPC

827518037386

DESCRIPTION

Meet the DK2 20,000 lb Hydraulic Winch – a robust solution for heavy loads. With a powerful 20,000 lb pull and hydraulic motor, it ensures reliable performance. The wired remote, 2-stage planetary gear train, and 33:1 ratio provide precision and efficiency. Safety is enhanced with the automatic brake, and the 14 mm x 24 m steel cable adds durability. Versatile mounting options (254 mm x 114 mm) make this winch a reliable, flexible choice for various applications. Enjoy peace of mind with a 3-year gear train warranty and a 3-year electrical warranty, reflecting the durability and confidence in the product's longevity.



SPECIFICATION

SINGLE RATED LINE PULL	20,000 lb (9,071.8 kg)
MOTOR	Hydraulic OMR-125
CONTROL	Wired
GEAR TRAIN	2-stage planetary
GEAR REDUCTION RATIO	33:1
BRAKING	Automatic
DRUM SIZE	3.5" x 8.8" (88 mm x 224 mm)
CABLE	Ø0.55" x 78.7 ft (Ø14 mm x 24 m)
MAX HYDRAULIC PRESSURE	2,466 PSI (17 MPa)
MAX HYDRAULIC FLOW	19.8 GPM (75 LPM)
MOUNTING PATTERN	10" x 4.5" (254 mm x 114 mm)
DIMENSIONS	20.9" (L) x 7.8" (W) x 8.8" (H) 53.1 cm (L) x 19.8 cm (W) x 22.4 cm (H)
WEIGHT	135.4 lb (61.4 kg)
SHIPPING DIMENSIONS	23.6" (L) x 12.8" (W) x 15.4" (H) 59.9 cm (L) x 32.5 cm (W) x 39.1 cm (H)
SHIPPING WEIGHT	146.4 lb (66.4 kg)
WARRANTY	3-year gear train, 7-year electrical



FEATURES

- Includes 3-year gear train warranty and 3-year electrical warranty
- Pulls up to 20,000 lb (9,071.8 kg)
- Featuring an OMR-125 hydraulic motor, the winch offers reliable and efficient power delivery, suitable for extended and demanding usage scenarios
- Corrosion resistant
- Wired remote control provides precise and convenient operation **1**
- Equipped with a 2-stage planetary gear train, the winch achieves a balance between speed and power
- 33:1 gear reduction ratio enhances pulling power
- Handle latch clutch for free spooling and automatic load-holding brake to ensure safety by holding the load securely
- 0.55" (14 mm) diameter and 78.7 ft (24 m) length steel cable
- 10" (254 mm) x 4.5" (114 mm) mounting pattern, compatible with different mounting systems
- Roller fairlead designed to extend the life of your cable or rope **2**
- High-strength, heavy-duty hook for your peace of mind **3**





WOODMAXX POWER EQUIPMENT LTD., a proud veteran-founded company, that has been at the forefront of the PTO power equipment industry for over a decade. We specialize in crafting cutting-edge machinery that meets the needs of professionals and DIY enthusiasts alike. Our range of high-quality, durable products is trusted by customers across North America for its reliability and performance. At WoodMaxx, we are dedicated to delivering outstanding customer service and innovative solutions that help our customers tackle any outdoor challenge with confidence.



5" DIRECT DRIVE GRAVITY-FEED PTO WOOD CHIPPER

ITEM NUMBER

MX-8500G+

UPC

850048655058

DESCRIPTION

Experience unparalleled performance with the WoodMaxx MX-8500G+ 5" Direct Drive Gravity-Feed PTO Wood Chipper, designed with sub-compact tractor owners in mind. Weighing under 425lbs, this chipper boasts a robust 3/4" thick structural steel flywheel. Engineered for simplicity and innovation, it requires no powered infeed system, belts, jackshafts, or hydraulics, ensuring exceptional efficiency and performance. Proudly made in the USA, this chipper includes our patent-pending rotary anvil, enhancing material infeed efficiency. Unlike traditional chippers with flat-edge stationary anvils, the cylindrical design increases the pulling effect, greatly boosting chipping capability. With a 5" chipping capacity, the MX-8500G+ is the ultimate choice for all your wood chipping needs.

SPECIFICATION

INFEED OPENING	8" x 5"
INFEED STYLE	Self-feeding
INFEED SPEED	Variable 50-100 ft.-min.
FLYWHEEL KNIVES	4 reversible USA made
WOOD DIAMETER	Up to 5"
MIN. POWER REQUIRED	15 PTO HP
ROTATING ASSEMBLY	24" x 3/4", 100 lb
DISCHARGE CHUTE	Adjustable
FLYWHEEL HOUSING	Clamshell
DIMENSIONS	51.9" x 35.7" x 60.3"
WEIGHT	425 lb
SHIPPING DIMENSIONS	41" x 48" x 38"
SHIPPING WEIGHT	500 lb
WARRANTY	3-year parts



FEATURES

- Proudly manufactured in the USA
- Patent pending cylindrical anvil, which assists in feeding material to create less friction, allowing for a smooth transition from log to chips
- 110 lb.- 24" diameter dynamically balanced flywheel
- 5" wide 1/4" thick, clamshell, flywheel housing for easy knife access **1**
- Equipped with four (4) USA Made A8 hardened tool steel knives
- Direct drive gravity feed PTO
- 42" sloped infeed bin **2**
- True 8" x 5" infeed opening **3**
- Clear vinyl chip baffle to protect user from chip blow-back
- Chips 3" hardwood, 4" softwood, and up to 5" material with 50+ HP effortlessly



PTO CATEGORY
REQUIREMENT

**CAT 1
CAT 2**

MINIMUM HP
REQUIRED

**15 PTO
HP**



6" DIRECT DRIVE HYDROSTATIC WOOD CHIPPERS

PTO & SKID STEER MODELS

ITEM NUMBER MX-8600
UPC 850048655003

ITEM NUMBER MX-8600SS
UPC 850048655225

DESCRIPTION

Streamline your wood chipping tasks with the WoodMaxx MX-8600 6" Direct Drive Hydrostatic Wood Chipper, available in both PTO and Skid Steer models. Featuring a patented hydrostatic infeed system, this American-made chipper comes equipped with an 8" x 6" infeed opening for optimal performance. The self-contained hydrostatic auto-feed system ensures seamless operation, providing smooth, precise infeed speed control for effortless wood chipping with minimal adjustments. The MX-8600 boasts a 24" diameter dynamically balanced flywheel and four USA-made A8 tool steel knives. Its unique octagonal-shaped infeed roller enhances material handling efficiency. With a true 6" chipping capacity for hardwood and 8" for softwood, the MX-8600 is your ultimate solution for all wood chipping needs.

SPECIFICATION

MODEL	MX-8600	MX-8600SS
INFEED OPENING	8" x 6"	
INFEED STYLE	Hydrostatic	
INFEED SPEED	Reversible 0-75 ft.-min.	
FLYWHEEL KNIVES	4 reversible USA made	
WOOD DIAMETER	Up to 6"	
MIN. POWER REQUIRED	15 PTO HP	16-24 GPM
ROTATING ASSEMBLY	24" x 3/4", 120 lb	
DISCHARGE CHUTE	360-degree swivel	
FLYWHEEL HOUSING	Clamshell	
DIMENSIONS	58.9" x 38.1" x 61"	73" x 46" x 61"
WEIGHT	580 lb	750 lb
SHIPPING DIMENSIONS	47" x 45" x 50"	59" x 51" x 51"
SHIPPING WEIGHT	770 lb	900 lb
WARRANTY	3-year parts	



FEATURES

- Proudly manufactured in the USA
- Trademarked and patented hydrostatic infeed system- the most powerful, efficient and speed variable infeed system available on the market **1**
- Requires only 2 quarts of conventional motor oil
- Equipped with a 200cc USA-Made hydraulic infeed motor
- Patented 8.25" diameter octagonal shaped commercial style infeed roller **2**
- High tension assist springs
- 120 lb 24" diameter dynamically balanced flywheel **3**
- High flow flywheel chamber ventilation
- Direct drive hydrostatic PTO
- Safety auto feed stop bar and infeed roller speed adjustment
- Four USA made, reversible dual edge knives



MX-8600



**PTO CATEGORY
REQUIREMENT**
**CAT 1
CAT 2**

**MINIMUM HP
REQUIRED**
**15 PTO
HP**

MX-8600SS



MINIMUM GPM REQUIRED
16-24 GPM



8" BELT DRIVEN HYDROSTATIC PTO WOOD CHIPPER

ITEM NUMBER

MX-8800

UPC

850048655034

DESCRIPTION

The WoodMaxx MX-8800 8" Belt Driven Hydrostatic PTO Wood Chipper is engineered for superior performance. Featuring a true 8" x 8" infeed opening and equipped with two high-quality, USA-made A8 tool steel knives, this chipper is designed for tractors with a category 1 or 2 three-point hitch and a minimum of 20 HP at the PTO. Its chipping capacity adjusts based on horsepower and torque, allowing it to chip 4" hardwood and 6" softwood with 20 HP. The 24" dynamically balanced flywheel, paired with specific engineering components, delivers 200 lbs. of energy for quick and efficient chipping. Backed by a 3-year warranty, the WoodMaxx MX-8800 ensures reliable and enduring performance for all your wood chipping needs.

SPECIFICATION

INFEED OPENING	8" x 8"
INFEED STYLE	Hydrostatic
INFEED SPEED	Reversible 0-75 ft.-min.
FLYWHEEL KNIVES	2 reversible USA made
WOOD DIAMETER	Up to 8"
MIN. POWER REQUIRED	20 PTO HP
ROTATING ASSEMBLY	24" x 1", 200 lb
DISCHARGE CHUTE	360-degree swivel
FLYWHEEL HOUSING	Clamshell
DIMENSIONS	72.4" x 37.3" x 73.6"
WEIGHT	772 lb
SHIPPING DIMENSIONS	54" x 45" x 62"
SHIPPING WEIGHT	1,004 lb
WARRANTY	3-year parts



FEATURES

- Proudly manufactured in the USA
- Trademarked and patented hydrostatic infeed system- the most powerful, efficient and speed variable infeed system available on the market **1**
- Requires only 2 quarts of conventional motor oil
- Equipped with a 200cc USA-Made hydraulic infeed motor
- Patented 8.25" diameter octagonal shaped commercial style infeed roller **2**
- High tension assist springs
- 200 lb, 24" diameter dynamically balanced flywheel **3**
- High flow flywheel chamber ventilation
- Belt driven hydrostatic PTO
- Safety auto feed stop bar and infeed roller speed adjustment
- Two USA-made, reversible dual edge knives



PTO CATEGORY
REQUIREMENT

**CAT 1
CAT 2**

MINIMUM HP
REQUIRED

**20 PTO
HP**



9" BELT DRIVEN HYDROSTATIC WOOD CHIPPERS

PTO & SKID STEER MODELS

ITEM NUMBER MX-9900
UPC 850048655027

ITEM NUMBER MX-9900SS
UPC 850048655010

DESCRIPTION

The WoodMaxx MX-9900 9" Belt Driven Hydrostatic Wood Chipper, also known as "The Beast," is available in both skid steer and PTO versions to cater to diverse needs. Featuring a true 9" x 9" infeed opening, this chipper is equipped with four high-quality, USA-made A8 tool steel knives. Exclusive to the MX-9900 are the fold-up infeed bin and hinged infeed hopper, which simplify storage, transport, and routine maintenance. It comes shipped to you in a wooden crate and is 100% assembled upon delivery. Backed by the quality and reliability of WoodMaxx, the MX-9900 ensures top-tier performance and durability for all your wood chipping tasks.

SPECIFICATION

MODEL	MX-9900	MX-9900SS
INFEED OPENING	9" x 9"	
INFEED STYLE	Hydrostatic	
INFEED SPEED	Reversible 0-75 ft.-min.	
FLYWHEEL KNIVES	4 reversible USA made	
WOOD DIAMETER	Up to 9"	
MIN. POWER REQUIRED	25 PTO HP	16-30 GPM
ROTATING ASSEMBLY	26.5" x 1", 220 lb	
DISCHARGE CHUTE	360-degree swivel	
FLYWHEEL HOUSING	Clamshell	
DIMENSIONS	72.8" x 40.3" x 73.8"	43" x 79" x 74"
WEIGHT	816 lb	1,459 lb
SHIPPING DIMENSIONS	54" x 45" x 62"	56" x 56" x 57"
SHIPPING WEIGHT	1,048 lb	1,505 lb
WARRANTY	3-year parts	



FEATURES

- Proudly manufactured in the USA
- Trademarked and patented hydrostatic infeed system- the most powerful, efficient and speed variable infeed system available on the market **1**
- Requires only 2 quarts of conventional motor oil
- Equipped with a 200cc USA-Made hydraulic infeed motor
- Patented 8.25" diameter octagonal shaped commercial style infeed roller **2**
- High tension assist springs
- 225 lb, 26.5" diameter dynamically balanced flywheel
- Swivel infeed bin, which allows for easy bed knife access
- Fold up infeed for storage and transport **3**
- Hinged infeed hopper **4**
- Belt-driven hydrostatic PTO
- Four USA made, reversible dual edge knives



MX-9900



PTO CATEGORY
REQUIREMENT

CAT 1
CAT 2

MINIMUM HP
REQUIRED

25 PTO
HP

MX-9900SS



MINIMUM GPM REQUIRED

16-24 GPM



8" BELT DRIVEN HYDRAULIC PTO WOOD CHIPPER

ITEM NUMBER

WM-8H

UPC


850048655041

DESCRIPTION

The WoodMaxx WM-8H 8" Belt Driven Hydraulic PTO Wood Chipper delivers unmatched performance and reliability for your wood chipping needs. Built with precision from CNC plasma-cut structural plate steel, this chipper offers durability and resilience. Its high-quality A8 carbon steel, dual-edge flywheel knives, and bed knife ensure efficient and precise cutting. The hydraulic system simplifies operation, making wood chipping effortless. With a robust 200lb., 24" diameter flywheel and a requirement of just 19 PTO horsepower, the WM-8H handles a wide range of wood chipping tasks with ease. The 8mm thick steel flywheel housing guarantees lasting strength, even in demanding conditions. Featuring a 360-degree swivel discharge chute, you can easily direct the chipped material wherever needed. Backed by a solid 3-year parts warranty and exceptional customer support, the WoodMaxx WM-8H promises reliable and efficient wood chipping for the long haul.

SPECIFICATION

INFEED OPENING	8" x 8"
INFEED STYLE	Hydraulic
INFEED SPEED	Reversible 0-75 ft.-min.
FLYWHEEL KNIVES	2 reversible A8 carbon steel
WOOD DIAMETER	Up to 8"
MIN. POWER REQUIRED	19 PTO HP
ROTATING ASSEMBLY	24" x 1", 200 lb
DISCHARGE CHUTE	360-degree swivel
FLYWHEEL HOUSING	Easy access
DIMENSIONS	78" x 57.1" x 82.7"
WEIGHT	872 lb
SHIPPING DIMENSIONS	47" x 36.6" x 48"
SHIPPING WEIGHT	989 lb
WARRANTY	3-year parts



FEATURES

- Self contained hydraulic system with dual infeed motors **1**
- Requires 7 gallons of ISO-46 hydraulic fluid
- 200 lb, 24" diameter dynamically balanced flywheel
- High flow flywheel chamber ventilation
- 6.25" diameter hardened steel Commercial style infeed rollers
- Heavy-duty 5/8" cogged drive V-belts
- 8" x 8" infeed opening
- Adjustable base legs
- Skid type support base **2**
- Safety auto feed stop bar and infeed Roller speed adjustment **3**
- Fully adjustable infeed roller tension springs
- Two reversible A8 carbon steel dual edge knives



PTO CATEGORY
REQUIREMENT

**CAT 1
CAT 2**

MINIMUM HP
REQUIRED

**19 PTO
HP**



8" BELT DRIVEN MECHANICAL PTO WOOD CHIPPER

ITEM NUMBER
WM-8M

UPC
850048655065

DESCRIPTION

The WoodMaxx WM-8M 8" Belt Driven Mechanical PTO Wood Chipper is a robust fusion of strength, efficiency, and reliability. Meticulously crafted from CNC plasma-cut structural plate steel, this chipper embodies resilience and durability. Its high quality A8 carbon steel, dual edge flywheel knives and bed knife ensure precise cutting, supported by the self-contained hydraulic system for seamless operation. Engineered with a 200lb. 24" diameter flywheel and a compact design requiring 19 PTO horsepower, this chipper excels at diverse wood chipping tasks. The 8mm thick steel flywheel housing ensures unmatched durability, even in harsh conditions. Moreover, the 360-degree swivel discharge chute offers precise control over chipped material direction. Backed by a comprehensive 3-year parts warranty and exceptional customer service, investing in the WoodMaxx WM-8M guarantees dependable, hassle-free wood chipping for years ahead.

SPECIFICATION

INFEED OPENING	8" x 8"
INFEED STYLE	Mechanical
INFEED SPEED	Fixed 58 ft.-min.
FLYWHEEL KNIVES	2 reversible A8 carbon steel
WOOD DIAMETER	Up to 8"
MIN. POWER REQUIRED	19 PTO HP
ROTATING ASSEMBLY	24" x 1", 200 lb
DISCHARGE CHUTE	360-degree swivel
FLYWHEEL HOUSING	Easy access
DIMENSIONS	78" x 51.2" x 82.7"
WEIGHT	796 lb
SHIPPING DIMENSIONS	47" x 36.6" x 48"
SHIPPING WEIGHT	923 lb
WARRANTY	3-year parts



FEATURES

- Belt driven gear box and drive axle system
- Requires 4 oz of 80-90W gear oil
- 200 lb, 24" diameter dynamically balanced flywheel
- High flow flywheel chamber ventilation
- 6.25" diameter hardened steel commercial style infeed rollers
- Heavy-duty 5/8" cogged drive V-belts
- Adjustable base legs
- 8" x 8" infeed opening **1**
- Skid type support base **2**
- Safety auto feed stop bar and infeed roller speed adjustment **3**
- Fully adjustable infeed roller tension springs
- Two reversible A8 carbon steel dual edge knives



PTO CATEGORY
REQUIREMENT
**CAT 1
CAT 2**

MINIMUM HP
REQUIRED
**19 PTO
HP**



PTO BACKHOE ATTACHMENTS

ITEM NUMBER WM-6600
UPC 850048655249

ITEM NUMBER WM-7600
UPC 850048655256

ITEM NUMBER WM-8600
UPC 850048655263

DESCRIPTION

WoodMaxx PTO Backhoes feature an exclusive SAE or ISO Pattern Control Switch for precise operation. They come equipped with an optional mechanical or hydraulic thumb and a powerful hydraulic system, offering digging depths from 7 to 9 feet to tackle excavation tasks effortlessly. For added versatility, consider the optional Ripper Attachment, ideal for breaking up rocky ground, tree roots, stumps, and brush. Our backhoes offer six bucket sizes ranging from 9 to 24 inches, catering to various project needs, and include an Optional Backhoe Bucket Quick Attach for easy bucket changes, enhancing operational efficiency. WoodMaxx backhoes also feature replaceable bushings pressed into the pin bosses for easy maintenance and prolonged durability, allowing hassle-free replacement when needed. Compatible with tractors starting at 15 PTO horsepower, their sturdy yet compact build ensures efficient operation. Backed by WoodMaxx's 2-year warranty and exceptional service, your investment is secure for dependable performance.



FEATURES

- Made in Italy hydraulic controls
- Manufactured with replaceable bushings
- One piece gear pump made from high strength aluminum center housing and cast iron end plates
- Optional ripper attachment to break up rocky ground, tree roots, stumps, brush
- Optional bucket quick attach
- Replaceable hardened bucket teeth **1**
- Easy access cartridge type oil filter
- Rust resistant powder coat finish
- Smooth hydraulic controls to ensure the proper flow and pressure are achieved at 540RPM PTO speed **2**
- 180-degree boom swing **3**
- 5 Bucket Sizes to choose from (9", 12", 15", 20", 24")

SPECIFICATION

MODEL	WM-6600	WM-7600	WM-8600
DIGGING DEPTH	7 ft.	8 ft.	9 ft.
MIN. POWER REQUIRED	15 PTO HP	20 PTO HP	25 PTO HP
MIN. TRACTOR WEIGHT	1,500 lb	2,300 lb	3,200 lb
MIN. WHEEL BASE	57"	60"	70"
DIMENSIONS	89" x 64" x 54"	90" x 64.5" x 54"	90.5" x 64.5" x 54"
WEIGHT	995 lb	1,030 lb	1,150 lb
SHIPPING DIMENSIONS	82" x 34" x 72"		
SHIPPING WEIGHT	1,350 lb	1,350 lb	1,400 lb
WARRANTY	2-year parts		



**MINIMUM
PTO
SPECS**



WM-6600

**PTO CATEGORY
REQUIREMENT**

CAT 1

**MINIMUM HP
REQUIRED**

**15 PTO
HP**

**MINIMUM
TRACTOR WEIGHT**

**1500
LB**

WM-7600

**PTO CATEGORY
REQUIREMENT**

**CAT 1
CAT 2**

**MINIMUM HP
REQUIRED**

**20 PTO
HP**

**MINIMUM
TRACTOR WEIGHT**

**2300
LB**

WM-8600

**PTO CATEGORY
REQUIREMENT**

**CAT 1
CAT 2**

**MINIMUM HP
REQUIRED**

**25 PTO
HP**

**MINIMUM
TRACTOR WEIGHT**

**3200
LB**



4" SELF-FEEDING GAS POWERED WOOD CHIPPER

ITEM NUMBER

DC-1260

UPC

850048655270

DESCRIPTION

The WoodMaxx DC-1260 Gas Powered Wood Chipper combines power and efficiency to tackle your toughest wood chipping tasks. Equipped with a professional-grade 14HP Vanguard 25V3 commercial series gasoline engine, this chipper features a large 12" x 6" infeed opening capable of handling material up to 4 inches in diameter. The self-feeding design, aided by a sloped infeed bin, pulls branches in at a rate of up to 50 feet per minute, making your work faster and easier. Backed by WoodMaxx's 2-year warranty, the DC-1260 guarantees reliable performance and is an excellent investment for efficient wood chipping.

SPECIFICATION

ENGINE	Vanguard 25V3 13.5 hp 408 cc
INFEED OPENING	12" x 6"
INFEED STYLE	Self-feeding
INFEED SPEED	Fixed 50 ft.-min.
FLYWHEEL KNIVES	2 reversible A8 carbon steel
WOOD DIAMETER	Up to 4"
ROTATING ASSEMBLY	10" x 12" drum, 53 lb
DISCHARGE CHUTE	360-degree swivel
FLYWHEEL HOUSING	Easy access
DIMENSIONS	100" x 32" x 57.5"
WEIGHT	442 lb
SHIPPING DIMENSIONS	35.2" x 30.1" x 48.4"
SHIPPING WEIGHT	477 lb
WARRANTY	3-year Vanguard engine, 2-year parts



FEATURES

- Equipped with a 14 hp Vanguard 400 OHV 25V3 Commercial Series Engine **1**
- 2-ply rugged directional 16 x 8.0-7 tires and removable tow hitch with 2" ball **2**
- Hinged infeed hopper with stainless steel bin latches for easy knife access **3**
- EPDM rubber compound high temp rated 3-belt drive system.
- Heavy-duty centrifugal clutch
- Clear vinyl chip baffle to protect user from chip blow-back
- Digital hour meter/tachometer
- 2 heavy-duty main shaft bearings
- Safety stop bar **4**
- Machine 90% assembled upon delivery
- Rust resistant powder coat finish
- Comes with 3-year Vanguard engine warranty and 2-year parts warranty





59" PTO FLAIL MOWERS

STANDARD AND HYDRAULIC
SIDE SHIFT MODELS

ITEM NUMBER FM-62
UPC: H-BLADES 850048655379
UPC: Y-BLADES 850048655362


ITEM NUMBER FM-62H
UPC: H-BLADES 850048655386
UPC: Y-BLADES 850048655393

DESCRIPTION

The WoodMaxx FM-62 and FM-62H are engineered for CAT 1-tractors and offer a 59" cutting width. Featuring a choice between Y-blades or hammer blades, and a blade speed of 128 feet per second, these mowers deliver precise and efficient cutting performance. Equipped with 3 B-Series Truflex V-belts for enhanced durability, an automatic drive belt tensioner, and replaceable skid shoes, the WoodMaxx flail mowers provide unmatched convenience and reliability. The FM-62H model includes a hydraulic side-shift feature that enables variable offset from center to the right of the tractor, perfect for navigating fences, buildings, walkways, and other obstacles. Compatible with tractors ranging from 18 to 40 PTO horsepower, these mowers are designed for enduring, top-tier performance. Backed by WoodMaxx's renowned 2-year warranty, they guarantee dependable operation and longevity.

SPECIFICATION

MODEL	FM-62	FM-62H
CUTTING WIDTH	59"	
OVERALL WIDTH	65"	
PTO REQUIREMENTS	20-45 PTO HP and 540 PTO RPM	
3 POINT HITCH	CAT 1/CAT 2	
SHIFTED RIGHT	L: 29" R: 36"	L: 22.5" R: 43"
SHIFTED LEFT		L: 36" R: 29"
BLADE COUNT	H-BLADES: 18 Y-BLADES: 18	
SPINDLE RPM	2,160 RPM	
SWING DIAMETER	13.5"	
BLADE SPEED	128 ft.-sec.	
TUBE DIAMETER	4.25"	
ROLLER DIAMETER	5 1/4"	
DIMENSIONS	34.3" x 64.5" x 34.6"	
WEIGHT	641 lb	716 lb
SHIPPING DIMENSIONS	67" x 35" x 29"	
SHIPPING WEIGHT	860 lb	
WARRANTY	2-year parts	



FEATURES

- NSK brand shaft bearings
- Side plate: 1/4" .250" structural Q235 steel
- Deck plate: 4 gauge .25" structural Q235 steel
- 3/4" – 3-3/4" adjustable to meet various height requirements
- Optional hammer blades (clearing saplings 1" or less) or Y-blades (grasses)
- Hinged rear gate allowing for easy inspection and maintenance **1**
- Balanced rotor tube and cast iron pulleys
- Up to 45 hp heavy duty proven oil bath gearbox
- Equipped with 3 total B-series USA gates "trueflex" drive belts & drive belt tensioner **2**
- 1-3/8" 6 spline w/slip clutch
- Replaceable skid shoes
- Hydraulic side shift model (FM-62H) allows for variable offset from center to the right of the tractor **3**



PTO CATEGORY
REQUIREMENT
**CAT 1
CAT 2**

MINIMUM HP
REQUIRED
**15-45
PTO HP**

MINIMUM PTO
SPEED
**540
RPM**



74" PTO FLAIL MOWERS

STANDARD AND HYDRAULIC
SIDE SHIFT MODELS

ITEM NUMBER FM-78
UPC: H-BLADES 850048655416
UPC: Y-BLADES 850048655409

ITEM NUMBER FM-78H
UPC: H-BLADES 850048655430
UPC: Y-BLADES 850048655423

DESCRIPTION

The WoodMaxx FM-78 and FM-78H are engineered for CAT 1 and CAT 2 tractors and offer a 59" cutting width. Featuring a choice between Y-blades or hammer blades, and a blade speed of 128 feet per second, these mowers deliver precise and efficient cutting performance. Equipped with 3 B-Series Truflex V-belts for enhanced durability, an automatic drive belt tensioner, and replaceable skid shoes, the WoodMaxx flail mowers provide unmatched convenience and reliability. The FM-78H model includes a hydraulic side-shift feature that enables variable offset from center to the right of the tractor, perfect for navigating fences, buildings, walkways, and other obstacles. Compatible with tractors ranging from 20-45 PTO horsepower, these mowers are designed for enduring, top-tier performance. Backed by WoodMaxx's renowned 2-year warranty, they guarantee dependable operation and longevity.

SPECIFICATION

MODEL	FM-78	FM-78H
CUTTING WIDTH	74"	
OVERALL WIDTH	79.5"	
PTO REQUIREMENTS	30-65 PTO HP and 540 PTO RPM	
3 POINT HITCH	CAT 1/CAT 2	
SHIFTED RIGHT	L: 33" R: 46"	L: 22.5" R: 57"
SHIFTED LEFT		L: 36" R: 43"
BLADE COUNT	H-BLADES: 22 Y-BLADES: 22	
SPINDLE RPM	2,160 RPM	
SWING DIAMETER	13.5"	
BLADE SPEED	128 ft.-sec.	
TUBE DIAMETER	4.25"	
ROLLER DIAMETER	5 1/4"	
DIMENSIONS	34.3" x 80.3" x 34.7"	
WEIGHT	710 lb	804 lb
SHIPPING DIMENSIONS	82" x 35" x 29"	
SHIPPING WEIGHT	1,000 lb	
WARRANTY	2-year parts	



FEATURES

- NSK brand shaft bearings
- Side plate: 1/4" .250" structural Q235 steel
- Deck plate: 4 gauge .25" structural Q235 steel
- 3/4" – 3-3/4" adjustable to meet various height requirements
- Optional hammer blades (clearing saplings 1" or less) or Y-blades (grasses)
- Hinged rear gate allowing for easy inspection and maintenance **1**
- Balanced rotor tube and cast iron pulleys
- Up to 55 hp heavy duty proven oil bath gearbox
- Equipped with 3 total B-series USA gates "trueflex" drive belts & drive belt tensioner **2**
- 1-3/8" 6 spline w/slip clutch
- Replaceable skid shoes
- Hydraulic side shift model (FM-78H) allows for variable offset from center to the right of the tractor **3**



PTO CATEGORY
REQUIREMENT
**CAT 1
CAT 2**

MINIMUM HP
REQUIRED
**30-65
PTO HP**

MINIMUM PTO
SPEED
**540
RPM**



87" PTO FLAIL MOWERS

STANDARD AND HYDRAULIC
SIDE SHIFT MODELS

ITEM NUMBER FM-96
UPC: H-BLADES 850048655454
UPC: Y-BLADES 850048655447

ITEM NUMBER FM-96H
UPC: H-BLADES 850048655478
UPC: Y-BLADES 850048655461

DESCRIPTION

The WoodMaxx FM-96 and FM-96H are engineered for CAT 2 tractors and offer a 87" cutting width. Featuring a choice between Y-blades or hammer blades, and a blade speed of 138 feet per second, these mowers deliver precise and efficient cutting performance. Equipped with 3 B-Series Truflex V-belts for enhanced durability, an automatic drive belt tensioner, and replaceable skid shoes, the WoodMaxx flail mowers provide unmatched convenience and reliability. The FM-96H model includes a hydraulic side-shift feature that enables variable offset from center to the right of the tractor, perfect for navigating fences, buildings, walkways, and other obstacles. Compatible with tractors ranging from 50-90 PTO horsepower, these mowers are designed for enduring, top-tier performance. Backed by WoodMaxx's renowned 2-year warranty, they guarantee dependable operation and longevity.

SPECIFICATION

MODEL	FM-96	FM-96H
CUTTING WIDTH	87"	
OVERALL WIDTH	96.5"	
PTO REQUIREMENTS	50-90 PTO HP and 540 PTO RPM	
3 POINT HITCH	CAT 2	
SHIFTED RIGHT	L: 29" R: 65"	L: 26" R: 71"
SHIFTED LEFT		L: 39.5" R: 57"
BLADE COUNT	H-BLADES: 18 Y-BLADES: 18	
SPINDLE RPM	2,125 RPM	
SWING DIAMETER	15"	
BLADE SPEED	138 ft.-sec.	
TUBE DIAMETER	5"	
ROLLER DIAMETER	5 1/4"	
DIMENSIONS	37.8" x 96.9" x 37"	
WEIGHT	1,285 lb	1,351 lb
SHIPPING DIMENSIONS	98" x 39" x 34"	
SHIPPING WEIGHT	1,300 lb	1,432 lb
WARRANTY	2-year parts	



FEATURES

- NSK brand shaft bearings
- Side plate: 3/8" structural Q235 steel
- Deck plate: 1/4" structural Q235 steel
- 3/4" – 4" adjustable to meet various height requirements
- Optional hammer blades (clearing saplings 1" or less) or Y-blades (grasses)
- Hinged rear gate allowing for easy inspection and maintenance **1**
- Balanced rotor tube and cast iron pulleys
- Up to 90 hp heavy duty proven oil bath gearbox
- Equipped with 4 total B-series USA gates "trueflex" drive belts & drive belt tensioner **2**
- 1-3/8" 6 spline w/slip clutch
- Replaceable skid shoes
- Hydraulic side shift model (FM-96H) allows for variable offset from center to the right of the tractor **3**



PTO CATEGORY
REQUIREMENT
CAT 2

MINIMUM HP
REQUIRED
**50-90
PTO HP**

MINIMUM PTO
SPEED
**540
RPM**



PTO ROTARY TILLERS

ITEM NUMBER RT-58
UPC 850048655485


ITEM NUMBER RT-80
UPC 850048655492

DESCRIPTION

The WoodMaxx PTO Rotary Tillers are designed to deliver exceptional performance and durability for all your soil preparation needs. The RT-58, with its 58-inch tilling width, is perfect for medium-sized plots, while the RT-80, offering a wider 80-inch tilling width, is ideal for larger areas. Both models are built with robust materials and feature heavy-duty tines that penetrate the soil efficiently, ensuring thorough mixing and aeration. Compatible with tractors ranging from 18 to 50 PTO horsepower, these tillers provide versatile and reliable operation. Additionally, they come equipped with an adjustable tilling depth control, allowing you to customize the soil preparation according to your specific requirements. Backed by a dependable 2-year warranty, this will ensure peace of mind and long-term reliability for all your agricultural projects.

SPECIFICATION

MODEL	RT-58	RT-80
MIN. POWER REQUIRED	20-45 PTO HP	30-55 PTO HP
WORKING WIDTH	53"	73"
OVERALL WIDTH	58"	80"
OFFSET	5" (right of center)	10" (right of center)
WORKING DEPTH	8"	
FLANGE COUNT	6	8
TINES COUNT	30	42
ROTOR DIAMETER	3" diameter, 5/16" wall tube	
ROTOR SWING DIAMETER	19-1/2"	
DECK MATERIAL	5/32", .16", 8-gauge structural steel	
SIDE PLATE MATERIAL	5/16", .32", Q-235 structural steel	
DIMENSIONS	56.3" x 32.5" x 39"	78" x 32.5" x 39"
WEIGHT	639 lb	747 lb
SHIPPING DIMENSIONS	57.9" x 33.5" x 32.3"	79.5" x 33.5" x 32.3"
SHIPPING WEIGHT	771 lb	890 lb
WARRANTY	2-year parts	



FEATURES

- Self-sharpening C-shaped blades made of .25" 60Si2Mn spring steel
- Rotor Shaft Speed: 540 RPM
- Rear deflector to keep dirt in and maintain a level finish **1**
- ASAE 1- 3/8" – 6 spline shaft, proven cast iron, oil bath gearbox; ratio is 1.69:1 **2**
- T5 driveline with slip clutch torque limiter PTO Shaft
- Equipped with a parking stand
- Baked on powder coat finish **3**



**MINIMUM
PTO
SPECS**



	PTO CATEGORY REQUIREMENT	MINIMUM HP REQUIRED	MINIMUM PTO SPEED
RT-58	CAT 1 CAT 2	20-45 PTO HP	540 RPM
RT-80	CAT 1 CAT 2	30-55 PTO HP	540 RPM



Since opening in June 1988, **CURRAHEE TRAILERS** has grown from a three-person team to a leading manufacturer, producing over 100 trailers weekly for the Eastern United States. Our commitment to excellent customer service and quick deliveries is backed by high stock levels and meticulous attention to detail. We aim to offer **economical trailers that surpass your expectations for durability and performance.**





SINGLE AXLE DELUXE LANDSCAPE TRAILER



MADE IN THE USA

ITEM NUMBERS

L508, L510, L610, L612, L614



FEATURES

- 2" x 8" pressure treated wood floor **1**
- 2" A-frame coupler **2**
- D.O.T. approved LED lighting
- 4-way plug
- 3" channel tongue
- New 205/75R15 radial tires **3**
- A-frame tongue jack
- 2,990lb GVWR
- 3" x 2" x 3/16" angle main rail
- 3,500lb EZ lube idler axle
- Safety chains
- 12" tall angle top rail
- Taillight protectors
- Heavy-duty 4' landscape gate **4**
- Fenders with backings

MODEL	DIMENSIONS	WEIGHT
L508	5' X 8'	680LB
L510	5' X 10'	720LB
L610	76" X 10'	840LB
L612	76" X 12'	960LB
L614	76" X 14'	980LB



SINGLE AXLE LANDSCAPE TRAILER WITH SIDE GATE



MADE IN THE USA

ITEM NUMBER

L612SG

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 2" A-frame coupler **2**
- D.O.T. LED lighting 4-way plug
- 3" channel tongue
- New 205/75R15 radial tires **3**
- A-frame tongue jack
- 2,990lb GVWR
- 3" x 2" x 3/16" angle main rail
- 3,500lb EZ lube idler axle
- Safety chains
- 12" tall angle top rail
- Taillight protectors
- Heavy-duty 4' landscape gate **4**
- Fenders with backings



MODEL	DIMENSIONS	WEIGHT
L612SG	76" X 12'	1,060LB



SINGLE AXLE LANDSCAPE TRAILER WITH HIGH SIDES



MADE IN THE USA

ITEM NUMBERS

L508HS, L510HS, L610HS, L612HS

FEATURES

- 24" expanded metal sides **1**
- D.O.T. approved LED lighting
- 3" channel tongue **2**
- A-frame tongue jack
- 3" x 2" x 3/16" angle main rail
- 2" x 2" x 3/16" angle cross members
- 2" x 8" pressure treated wood floor **3**
- Heavy-duty 4' landscape gate
- 2" A-frame coupler
- 4-way plug
- New 205/75R15 radial tires **4**
- 2,990lb GVWR
- 3,500lb idler axle
- Safety chains
- Taillight protectors
- Fenders with backings



MODEL	DIMENSIONS	WEIGHT
L508HS	5' X 8'	700LB
L510HS	5' X 10'	820LB
L610HS	76" X 10'	940LB
L612HS	76" X 12'	1,150LB



SINGLE AXLE LIGHT-DUTY UTILITY TRAILER

 **MADE IN
THE USA**

ITEM NUMBERS
L508.13, L510.13



FEATURES

- 24" expanded metal sides **1**
- D.O.T. approved LED lighting
- 3" channel tongue **2**
- A-frame tongue jack
- 3" x 2" x 3/16" angle main rail
- 2" x 2" x 3/16" angle cross members
- 2" x 8" pressure treated wood floor **3**
- Heavy-duty 4' landscape gate
- 2" A-frame coupler
- 4-way plug
- New 205/75R15 radial tires **4**
- 2,990lb GVWR
- 3,500lb idler axle
- Safety chains
- Taillight protectors
- Fenders with backings

MODEL	DIMENSIONS	WEIGHT
L508.13	5' X 8'	500LB
L510.13	5' X 10'	540LB



TANDEM AXLE LIGHT-DUTY LANDSCAPE TRAILER



MADE IN THE USA

ITEM NUMBER

LD612NB

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 4' heavy-duty landscape gate **2**
- 2" A-frame coupler **3**
- A-frame tongue jack
- 2,990 GVWR
- D.O.T approved LED lighting
- 4-way plug
- Fenders with backing
- 3" x 2" x 3/16" angle main rail
- 3" x 2" x 3/16" angle cross members
- 4" channel tongue
- 14" tall angle top rail
- 2 x 3,500lb idler axles
- New 205/75R15 radial tires **4**
- White spoke wheels
- Safety chains



MODEL

DIMENSIONS

WEIGHT

LD612NB

76" X 12'

1,300LB



TANDEM AXLE LANDSCAPE TRAILER



**MADE IN
THE USA**

ITEM NUMBERS

LD612, LD614, LD616, LD620

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 2 x 5/16" A-frame coupler **2**
- 4' heavy-duty landscape gate **3**
- A-frame tongue jack
- Teardrop fenders with backing
- 7,000lb GVWR
- Breakaway kit
- Safety chains
- 3" x 2" x 3/16" angle cross members
- 14" tall angle top rail
- 3" x 2" x 3/16" angle frame
- D.O.T. approved LED lighting
- 7-way plug
- New 205/75R15 radial tires **4**
- White spoke wheels



MODEL	DIMENSIONS	WEIGHT
LD612	76" X 12'	1,420LB
LD614	76" X 14'	1,560LB
LD616	76" X 16'	1,600LB
LD620	76" X 20'	1,820LB



7K TANDEM AXLE EQUIPMENT TRAILER

 **MADE IN
THE USA**

ITEM NUMBERS

E716.7K, E718.7K

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 7,000lb GVWR
- 2 x 3,500lb brake axles
- 2 x 5/16" A-frame coupler **2**
- A-frame tongue jack
- Teardrop fenders with backing
- Breakaway kit
- Standard loops/stake pockets
- White spoke wheels
- 5" channel main rail
- 3" channel cross members on 24" center
- 3" channel ramps 64" length **3**
- D.O.T. approved LED lighting
- Shockproof LED taillights
- Taillight protectors
- 7-way plug
- New 205/75R15 radial tires **4**
- Safety chains



MODEL	DIMENSIONS	WEIGHT
E716.7K	82" X 16'	1,820LB
E718.7K	82" X 18'	1,940LB



7K TANDEM AXLE DELUXE EQUIPMENT TRAILER



MADE IN THE USA

ITEM NUMBERS

E716.7KD, E718.7KD



1



2



3



4

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 7,000lb GVWR
- 2 x 3,500lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb drop foot jack
- Diamond plate fenders with backing
- New 205/75R15 radial tires **3**
- Taillight protectors
- Safety chains
- 5" channel main rail
- 3" channel cross members on 24" center
- 3" channel flip-up ramps 64" length **4**
- Dovetail
- Breakaway kit
- D.O.T. approved LED lighting
- Shockproof LED taillights
- 7-way plug
- Standard loops/stake pockets

MODEL	DIMENSIONS	WEIGHT
E716.7KD	82" X 16'	1,820LB
E718.7KD	82" X 18'	1,940LB



10K TANDEM AXLE EQUIPMENT TRAILER

 **MADE IN
THE USA**

ITEM NUMBERS

E716.10K, E718.10K, E720.10K

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 9,800lb GVWR
- 2 x 5,200lb brake axles
- 2 x 5/16" A-frame coupler **2**
- A-frame tongue jack
- New 225/75R15 radial tires **3**
- 6-lug white spoke wheels
- Teardrop fenders with backing
- 6" channel main rail
- 3" channel cross members on 24" center
- 3" channel flip-up ramps 64" length **4**
- D.O.T. approved LED lighting
- 7-way plug
- Breakaway kit
- Standard loops/stake pockets
- Safety chains



MODEL	DIMENSIONS	WEIGHT
E716.10K	82" X 16'	2,100LB
E718.10K	82" X 18'	2,200LB
E720.10K	82" X 20'	2,500LB



10K TANDEM AXLE DELUXE EQUIPMENT TRAILER



**MADE IN
THE USA**

ITEM NUMBERS

E716.10KD, E718.10KD, E720.10KD



FEATURES

- 2" x 8" pressure treated wood floor **1**
- 9,800lb GVWR
- 2 x 5,200lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Shockproof LED lights
- Taillight protectors
- 7-way plug
- Breakaway kit
- 6" channel main rail
- 3" channel cross members on 24" center
- 3" channel flip-up ramps 5' length **3**
- Dovetail
- New 225/75R15 radial tires **4**
- 6-lug white spoke wheels
- Diamond plate fenders with backing
- Standard loops/stake pockets
- Safety chains

MODEL	DIMENSIONS	WEIGHT
E716.10KD	82" X 16'	2,100LB
E718.10KD	82" X 18'	2,200LB
E720.10KD	82" X 20'	2,350LB




12K TANDEM AXLE DELUXE EQUIPMENT TRAILER



**MADE IN
THE USA**

ITEM NUMBERS

E716.12KD, E718.12KD, E720.12KD

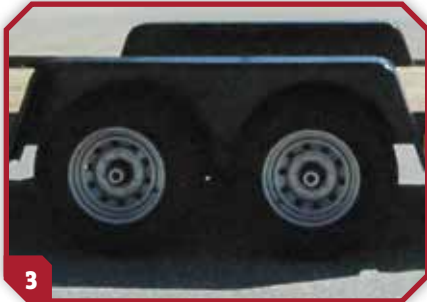

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 12,000lb GVWR
- 2 x 6,000lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Diamond plate fenders with backing
- Dovetail
- Standard loops/stake pockets
- New 235/80R16 radial tires **3**
- 8-lug wheels
- 6" channel main rail
- 3" channel cross members on 24" center
- Channel flip-up ramps 5' length **4**
- D.O.T. approved LED lighting
- Grommet mounted LED lights
- Taillight protectors
- 7-way plug
- Breakaway kit
- Tag bracket
- Safety chains

MODEL	DIMENSIONS	WEIGHT
E716.12KD	82" X 16'	2,140LB
E718.12KD	82" X 18'	2,140LB
E720.12KD	82" X 20'	2,400LB



12K TANDEM AXLE DECK OVER TRAILER

 **MADE IN THE USA**

ITEM NUMBERS
E820.12K, E824.12K



FEATURES

- 2" x 8" pressure treated wood floor **1**
- 12,000lb GVWR
- 2 x 6,000lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Standard loops/stake pockets
- New 235/80R16 radial tires **3**
- 8-lug wheels
- Standard loops/stake pockets
- 6" channel main rail
- 3" channel cross members on 24" center
- D.O.T. approved LED lighting
- 7-way plug
- Breakaway kit
- Taillight protectors
- Tag bracket
- Safety chains

MODEL	DIMENSIONS	WEIGHT
E820.12K	96" X 20'	3,150LB
E824.12K	96" X 24'	3,640LB



**12K TANDEM AXLE DECK
OVER TRAILER WITH
EQUIPMENT PACKAGE**



**MADE IN
THE USA**

ITEM NUMBERS

E820.12KD, E824.12KD



FEATURES

- 2" x 8" pressure treated wood floor **1**
- 12,000lb GVWR
- 2 x 6,000lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Standard loops/stake pockets
- New 235/80R16 radial tires **3**
- 8-lug wheels
- Standard loops/stake pockets
- 6" channel main rail
- 3" channel cross members on 24" center
- 4' dovetail
- D.O.T. approved LED lighting
- Shockproof LED taillights
- 7-way plug
- Breakaway kit
- Taillight protectors
- Tag bracket
- Safety chains
- Corrosion resistant polyurethane paint

MODEL	DIMENSIONS	WEIGHT
E820.12KD	96" X 20'	3,150LB
E824.12KD	96" X 24'	3,640LB



7K TANDEM AXLE CAR HAULER TRAILER



MADE IN THE USA

ITEM NUMBERS

C716, C718



FEATURES

- 2" x 8" pressure treated wood floor **1**
- 7,000lb GVWR
- 2 x 3,500lb brake axles
- 2 x 5/16" A-frame coupler **2**
- A-frame tongue jack
- Fenders with backing
- New 205/75R15 radial tires **3**
- White spoke wheels
- Taillight protectors
- 5" x 3" x 1/4" angle main rail
- 3" x 2" x 3/16" angle cross members
- 5' rear slide-in ramps **4**
- Standard loops/stake pockets
- D.O.T. approved LED lighting
- 7-way plug
- Breakaway kit
- Tag bracket
- Safety chains

MODEL	DIMENSIONS	WEIGHT
C716	82" X 16'	1,600LB
C718	82" X 18'	1,820LB



SNOWBEAR® PLOWS specializes in personal snowplows, and PTO & skid steer snow blowers all designed to make your outdoor work and recreation effortless. Our products are built tough for the harshest conditions yet simple to use. Enjoy the confidence that comes with top-tier equipment designed with you in mind. Spend less time worrying about snow and more time enjoying the season with SnowBear®.



HITCH-MOUNTED SNOW PLOWS

ITEM NUMBER AVAL8219
UPC 826518004992

ITEM NUMBER AVAL8422
UPC 826518005005

ITEM NUMBER AVAL8826
UPC 826518005708

DESCRIPTION

The SnowBear® T-Frame Mounted Snow Plows allow you to quickly and effectively remove snow from your driveway or small parking lot. These plows simply slide into a 2" front mount receiver for easy removal and storage. Each plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch. Each plow kit will also include a set of blade stiffeners for added strength by creating a 3 point connection.

SPECIFICATION

ITEM NUMBER	AVAL8219
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	288 lb (130.6 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	AVAL8422
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	296 lb (134.3 kg)
SHIPPING DIMENSIONS	44" (L) x 32" (W) x 18" (H) 111.8 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	AVAL8826
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	341 lb (154.7 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



FEATURES

- Fits most light trucks and SUV's
- Easy to mount - simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage **1**
- An electric winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength





HITCH-MOUNTED ELITE SNOW PLOWS

ITEM NUMBER AVAL8219ELT
UPC 826518005661

ITEM NUMBER AVAL8422ELT
UPC 826518005685

ITEM NUMBER AVAL8826ELT
UPC 826518005715

DESCRIPTION

The SnowBear® T-Frame Mounted ELITE Series Snow Plows allow you to quickly and effectively remove snow from your driveway or small parking lot. These plows simply slide into a 2" front mount receiver for easy removal and storage. Each snow plow ships complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit, and a wireless electric actuator for extra strength and reliability. Each plow kit will also include a set of blade stiffeners for added strength by creating a 3 point connection.

SPECIFICATION

ITEM NUMBER	AVAL8219ELT
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	321 lb (145 kg)
SHIPPING DIMENSIONS	46" (L) x 36" (W) x 18" (H) 116.8 cm (L) x 91.4 cm (W) x 45.7 cm (H)

ITEM NUMBER	AVAL8422ELT
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	334 lb (151.5 kg)
SHIPPING DIMENSIONS	44" (L) x 32" (W) x 18" (H) 111.8 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	AVAL8826ELT
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	341 lb (154.7 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



FEATURES

- Fits most light trucks and SUV's
- Easy to mount - simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage **1**
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control with built-in clutch, a strong chain, and uses less amperage than the winch, built with a completely sealed gearbox and housing **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage
- Each snow plow kit also includes a set of blade stiffeners for added strength
- Ships in a single carton on a standard size pallet





CUSTOM MOUNTED SNOW PLOWS

ITEM NUMBER RAMP8219
UPC 693495992167

ITEM NUMBER STOR8422
UPC 693495992174

ITEM NUMBER SUMM8826
UPC 693495992181

DESCRIPTION

All SnowBear® Snow Plows allow you to quickly & effectively remove snow from your driveway or small parking lot. SnowBear's range of personal plows each mount on to a vehicle specific custom mounting brackets.


Ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch.

SPECIFICATION

ITEM NUMBER	RAMPAGE II • RAMP8219
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	280 lb (127 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	STORM II • STOR8422
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	287 lb (130.2 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	SUMMIT II • SUMM8826
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	301 lb (136.5 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds **1**
- Slide out and roll away for storage
- A wireless winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- Ships in a single carton on a standard size pallet





CUSTOM MOUNTED ELITE SNOW PLOWS

ITEM NUMBER RAMP8219ELT
UPC 826518005326

ITEM NUMBER STOR8422ELT
UPC 826518005333

ITEM NUMBER SUMM8826ELT
UPC 826518004916

DESCRIPTION


SnowBear's line of personal snow plows just got better! The SnowBear® ELITE Series Snow Plow line up takes its simple yet effective design and improves on it with a wireless actuator for ultimate reliability. SnowBear's ELITE Series each mount on to a vehicle specific custom mounting brackets. Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a wireless electric actuator kit.

SPECIFICATION

ITEM NUMBER	RAMPAGE II ELITE • RAMP8219ELT
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	280 lb (127 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	STORM II ELITE • STOR8422ELT
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	287 lb (130.2 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)

ITEM NUMBER	SUMMIT II ELITE • SUMM8826ELT
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	301 lb (136.5 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds **1**
- Slide out and roll away for storage
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control with built-in clutch, a strong chain, and uses less amperage than the winch, built with a completely sealed gearbox and housing and IP67 dust and water rated **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage
- Each snow plow kit also includes a set of blade stiffeners for added strength
- Ships in a single carton on a standard size pallet





FULLY HYDRAULIC EVEREST SNOW PLOW

ITEM NUMBER

EVST9022

UPC

826518005579


DESCRIPTION

This prosumer, fully hydraulic snow plow kit provides you the opportunity to clear your parking lot, driveway, or lane way whenever required. With our fully hydraulic system you can raise, lower, and angle the snow plow blade from inside your vehicle using our wired hand held remote. For extreme durability against the elements and rust, SnowBear® combines an industrial powder-coated paint finish on the blade with hot dipped galvanized hardware components to keep your plow looking new for years.

The plow itself simply clips to a SnowBear® custom fitted vehicle mounting system and can pretty much mount to anything that's fit to push snow.

SPECIFICATION

ITEM NUMBER	EVST9022
BLADE DIMENSIONS	88" (W) x 22" (H) 223.5 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	425 lb (192.8 kg)
SHIPPING WEIGHT	450 lb (204.1 kg)
SHIPPING DIMENSIONS	48" (L) x 42" (W) x 40" (H) 121.9 cm (L) x 106.7 cm (W) x 101.6 cm (H)
CONSTRUCTION	Steel tube and sheet
COLOR/FINISH	Black industrial powder-coated blade skin and all other components
LIFT SYSTEM	Hydraulic
ANGLING SYSTEM	Hydraulic, multiple positions
CONTROL SYSTEM	Wired remote control to lift, lower and angle left or right
VEHICLE MOUNTING SYSTEM	Custom bolt-on mounting brackets *Sold separately
SCRAPER BLADE	Powder-coated steel, replaceable
INCLUDED	Snow deflector, skid shoes



FEATURES

- Ships partially assembled (mount & wiring required)
- Simple bolt on custom fitted mounting brackets, no drilling or welding required (sold separately) **1**
- Hydraulic system lifts and lowers blade **2**
- Light weight, no need to alter stock suspension
- Black UV powder coated components with an industrial painted blade skin **3**
- Self-leveling foot provides max blade tip clearance when the blade is fully raised
- Skid shoes to assist guiding the blade edge over uneven terrain or from possibly marking those more delicate driveways
- Snow deflector to assist directing snow minimizing windshield spray
- Wired hand held control **4**
- Blade hardware holds the hydraulic pump so it can be rolled away from the vehicle rather than being left on the truck with the mount
- Thicker trip springs to ensure tension remains strong and coils tight
- Existing holes in plow frame make it easy to add bolt-on accessories





PTO SNOW BLOWERS 48" AND 60" MODELS

ITEM NUMBER 324-048
UPC 827518054895

ITEM NUMBER 324-600
UPC 827518054901

DESCRIPTION

Experience unparalleled snow-clearing power with SnowBear PTO and Skid Steer Snow Blowers, engineered with marine-grade stainless steel hardware for exceptional durability in the harshest winter conditions. Offering versatility with optional hydraulic or electric chute/rotator and deflectors, these snow blowers provide precise control over snow discharge direction. Featuring heavy-duty augers and impellers, SnowBear snow blowers efficiently clear snow with cutting widths ranging from 48 to 84 inches, making them ideal for tackling even the heaviest snowfalls. Designed for use with 15 to 65 PTO horsepower tractors or skid steers with a GPM range of 16-30, these snow blowers ensure reliable performance and consistent snow removal season after season. Backed by SnowBear's dependable 2-year warranty, these snow blowers are a reliable investment for long-term snow removal needs.

SPECIFICATION

MODEL	324-048	324-600
CUTTING WIDTH	48"	59"
CUTTING HEIGHT	24"	26"
CUTTING EDGE	1/2" x 4" hardened bolt-on replaceable	
AUGER DIAMETER	15.5"	
AUGER TUBE DIAMETER	2-7/8"	
FAN DIAMETER	20"	22"
FAN DEPTH/THICKNESS	6.75" / 5/16"	
FAN BLADE TIP SPEED	2,827 ft.-min.	3,110 ft.-min.
CHUTE OUTLET DIAMETER/THICKNESS	9" / 1/8"	
MIN. POWER REQUIRED	15-25 PTO HP	18-30 PTO HP
DIMENSIONS	47.2" x 42.9" x 49.3"	59.1" x 42.9" x 62.1"
WEIGHT	595 lb	703 lb
SHIPPING DIMENSIONS	48.8" x 44.3" x 30.7"	60.6" x 44.3" x 30.7"
SHIPPING WEIGHT	694 lb	807 lb
WARRANTY	2-year parts	



FEATURES

- Bolt-on and replaceable skid shoes **1**
- 1/8" thick 9" diameter steel discharge chute with high density polyethylene liner **2**
- Equipped with a heavy gauge 3/16" (4.8mm) AR400 – equivalent tempered alloy steel 15.5" serrated auger **3**
- 4 paddle open center cupped blade style fan
- Cast iron oil bath gear box
- #60 grade roller chain transmission
- High intensity LED work light option
- Manual, electric, and hydraulic rotator and deflector available



**MINIMUM
PTO
SPECS**



	PTO CATEGORY REQUIREMENT	MINIMUM HP REQUIRED	MINIMUM PTO SPEED
324-048	CAT 1 CAT 2	15-25 PTO HP	540 RPM
324-600	CAT 1 CAT 2	18-30 PTO HP	540 RPM



PTO SNOW BLOWERS 72" AND 84" MODELS

ITEM NUMBER 324-720
UPC 827518054918

ITEM NUMBER 324-840
UPC 827518054925

DESCRIPTION

Experience unparalleled snow-clearing power with SnowBear PTO and Skid Steer Snow Blowers, engineered with marine-grade stainless steel hardware for exceptional durability in the harshest winter conditions. Offering versatility with optional hydraulic or electric chute/rotator and deflectors, these snow blowers provide precise control over snow discharge direction. Featuring heavy-duty augers and impellers, SnowBear snow blowers efficiently clear snow with cutting widths ranging from 48 to 84 inches, making them ideal for tackling even the heaviest snowfalls. Designed for use with 15 to 65 PTO horsepower tractors or skid steers with a GPM range of 16-30, these snow blowers ensure reliable performance and consistent snow removal season after season. Backed by SnowBear's dependable 2-year warranty, these snow blowers are a reliable investment for long-term snow removal needs.

SPECIFICATION

MODEL	324-720	324-840
CUTTING WIDTH	72"	84"
CUTTING HEIGHT	27"	
CUTTING EDGE	1/2" x 4" hardened bolt-on replaceable	
AUGER DIAMETER	17.5"	
AUGER TUBE DIAMETER	2-7/8"	
FAN DIAMETER	24"	
FAN DEPTH/THICKNESS	6.75" / 5/16"	
FAN BLADE TIP SPEED	3,393 ft.-min.	
CHUTE OUTLET DIAMETER/THICKNESS	9" / 1/8"	
MIN. POWER REQUIRED	25-65 PTO HP	
DIMENSIONS	70.9" x 44.8" x 63"	82.9" x 44.8" x 63"
WEIGHT	791 lb	915 lb
SHIPPING DIMENSIONS	72.4" x 44.3" x 30.7"	84.3" x 44.3" x 30.7"
SHIPPING WEIGHT	906 lb	1,032 lb
WARRANTY	2-year parts	



FEATURES

- Bolt-on and replaceable skid shoes **1**
- 1/8" thick 9" diameter steel discharge chute with high density polyethylene liner **2**
- Equipped with a heavy gauge 3/16" (4.8mm) AR400 – equivalent tempered alloy steel 17.5" serrated auger **3**
- 4 paddle open center cupped blade style fan
- Cast iron oil bath gear box
- #60 grade roller chain transmission
- High intensity LED work light option
- Manual, electric, and hydraulic rotator and deflector available



**MINIMUM
PTO
SPECS**



	PTO CATEGORY REQUIREMENT	MINIMUM HP REQUIRED	MINIMUM PTO SPEED
324-720	CAT 1 CAT 2	25-65 PTO HP	540 RPM
324-840	CAT 1 CAT 2	25-65 PTO HP	540 RPM

SKID STEER SNOW BLOWERS

72" AND 84" MODELS

ITEM NUMBER 324-SS72
UPC 827518054932

ITEM NUMBER 324-SS84
UPC 827518054949

DESCRIPTION

Experience unparalleled snow-clearing power with SnowBear PTO and Skid Steer Snow Blowers, engineered with marine-grade stainless steel hardware for exceptional durability in the harshest winter conditions. Offering versatility with optional hydraulic or electric chute/rotator and deflectors, these snow blowers provide precise control over snow discharge direction. Featuring heavy-duty augers and impellers, SnowBear snow blowers efficiently clear snow with cutting widths ranging from 48 to 84 inches, making them ideal for tackling even the heaviest snowfalls. Designed for use with 15 to 65 PTO horsepower tractors or skid steers with a GPM range of 16-30, these snow blowers ensure reliable performance and consistent snow removal season after season. Backed by SnowBear's dependable 2-year warranty, these snow blowers are a reliable investment for long-term snow removal needs.

SPECIFICATION

MODEL	324-SS72	324-SS84
CUTTING WIDTH	72"	84"
CUTTING HEIGHT	27"	
CUTTING EDGE	1/2" x 4" hardened bolt-on replaceable	
AUGER DIAMETER	17.5"	
AUGER TUBE DIAMETER	2-7/8"	
FAN DIAMETER	24"	
FAN DEPTH/THICKNESS	6.75" / 5/16"	
FAN BLADE TIP SPEED	3,393 ft.-min.	
CHUTE OUTLET DIAMETER/THICKNESS	9" / 1/8"	
MIN. HYDRAULIC FLOW	16-30 GPM	
DIMENSIONS	70.9" x 51.8" x 63"	82.9" x 51.8" x 63"
WEIGHT	957 lb	1,135 lb
SHIPPING DIMENSIONS	72.4" x 52" x 31.9"	84.3" x 52" x 31.9"
SHIPPING WEIGHT	1,091 lb	1,272 lb
WARRANTY	2-year parts	

FEATURES

- Bolt-on and replaceable skid shoes **1**
- 1/8" thick 9" diameter steel discharge chute with high density polyethylene liner **2**
- Equipped with a heavy gauge 3/16" (4.8mm) AR400 – equivalent tempered alloy steel 17.5" serrated auger **3**
- 4 paddle open center cupped blade style fan
- Cast iron oil bath gear box
- #60 grade roller chain transmission
- High intensity LED work light option
- Mounts to any universal skid steer attachment
- Manual, electric, and hydraulic rotator and deflector available



**MINIMUM
SKID STEER
SPECS**



324-SS72

MINIMUM GPM REQUIRED
16-24 GPM

324-SS84

MINIMUM GPM REQUIRED
16-24 GPM



A person wearing a safety vest and pants is operating a yellow DKA log skidder in a forest. The machine is moving logs, and the scene is filled with a warm, orange-red glow.


DKA[®]

A black WoodMaxx skidder is shown in a forest setting. The machine has a red handle and a license plate that reads "WX 9900". The background is a dense forest with trees and a body of water.

WoodMaxx

Power Equipment Ltd.

CURRAHEE TRAILERS

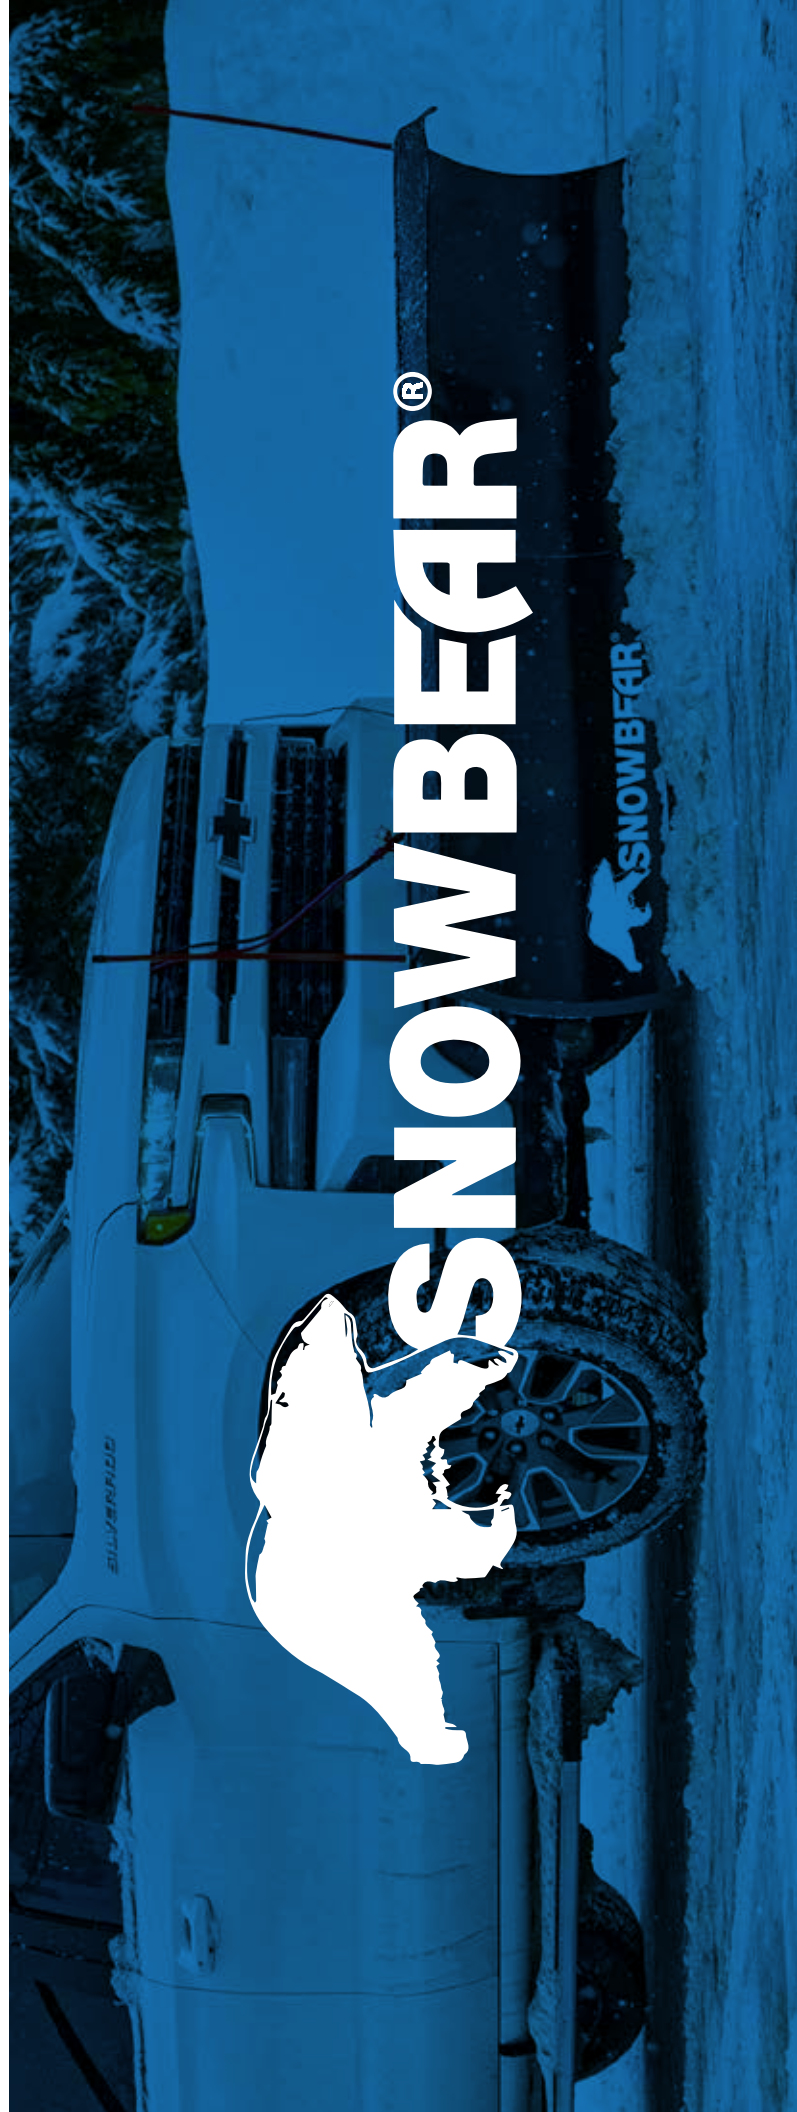

 **SNOWBEAR[®]**



PRODUCT CATALOG

- 2024 -



WoodMaxx
Power Equipment Ltd.

CURRAHEE TRAILERS

